Status and prospects for PRISM

J. Pasternak,

Imperial College London/RAL STFC, on behalf of PRISM Task Force and Snowmass'21 Study Group

Outline

- Introduction
- Challenges of PRISM
- R&D at Osaka and status
- Snowmass'21
- New concepts for injection
- Conclusions

Introduction

PRISM - Phase Rotated Intense Slow Muon beam

• Charged lepton flavor violation (cLFV) is strongly suppressed in the Standard Model, its detection would be a clear signal for new physics!
• The μ- + N(A,Z)→e- + N(A,Z) seems to be the most broadly sensitive laboratory for cLFV.
• COMET and Mu2e will seek a signal, but next steps are needed either in the case of a discovery (to further explore a new phenomenon) or further exclusion limits (to continue the search)
• The PRISM/PRIME experiment based on an FFA ring was proposed (Y. Kuno, Y. Mori) for a next generation cLFV search in order to:
- reduce the muon beam energy spread by phase rotation,
- purify the muon beam in the storage ring.
• PRISM requires a compressed proton bunch and high power proton beam
• This will provide a single event sensitivity of 3×10^{-19}

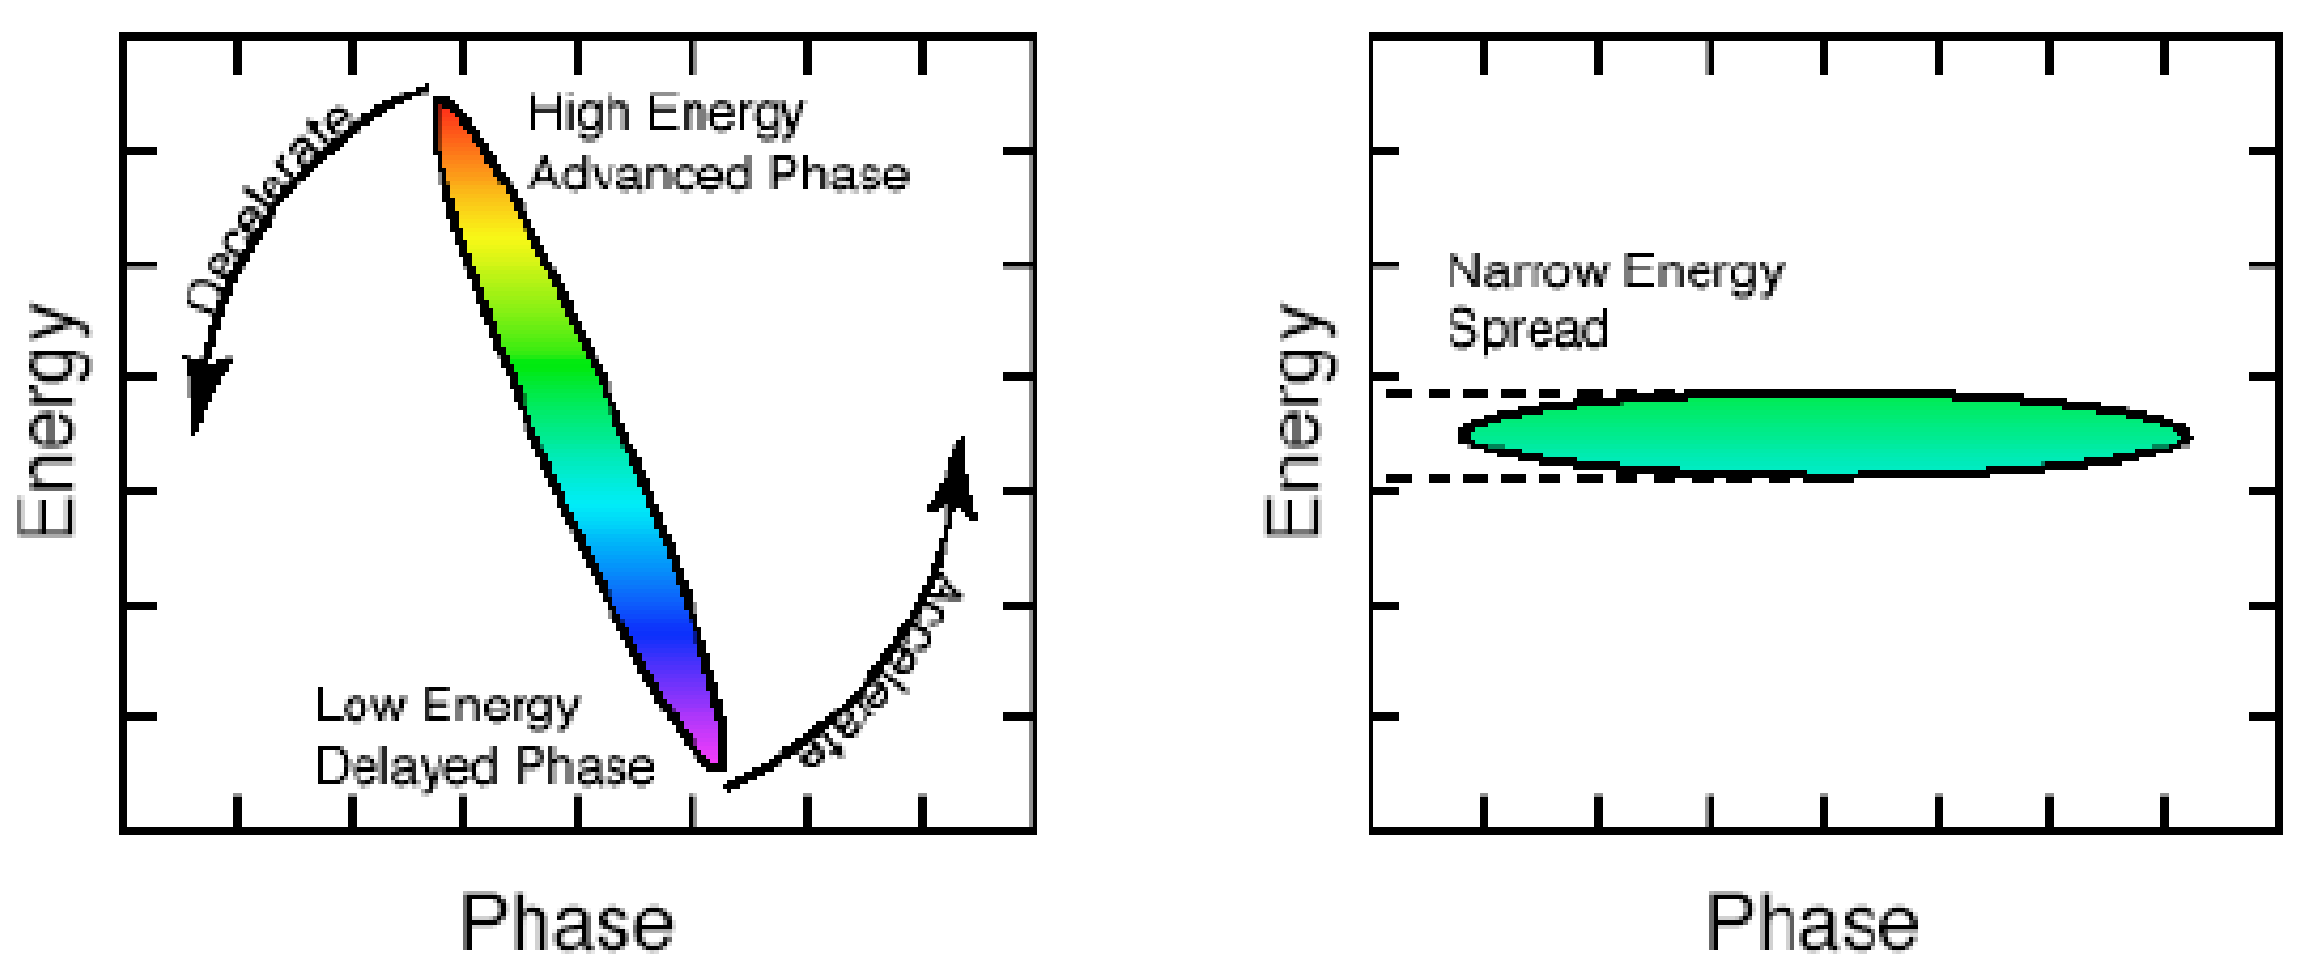

Conceptual Layout of PRISM/PRIME

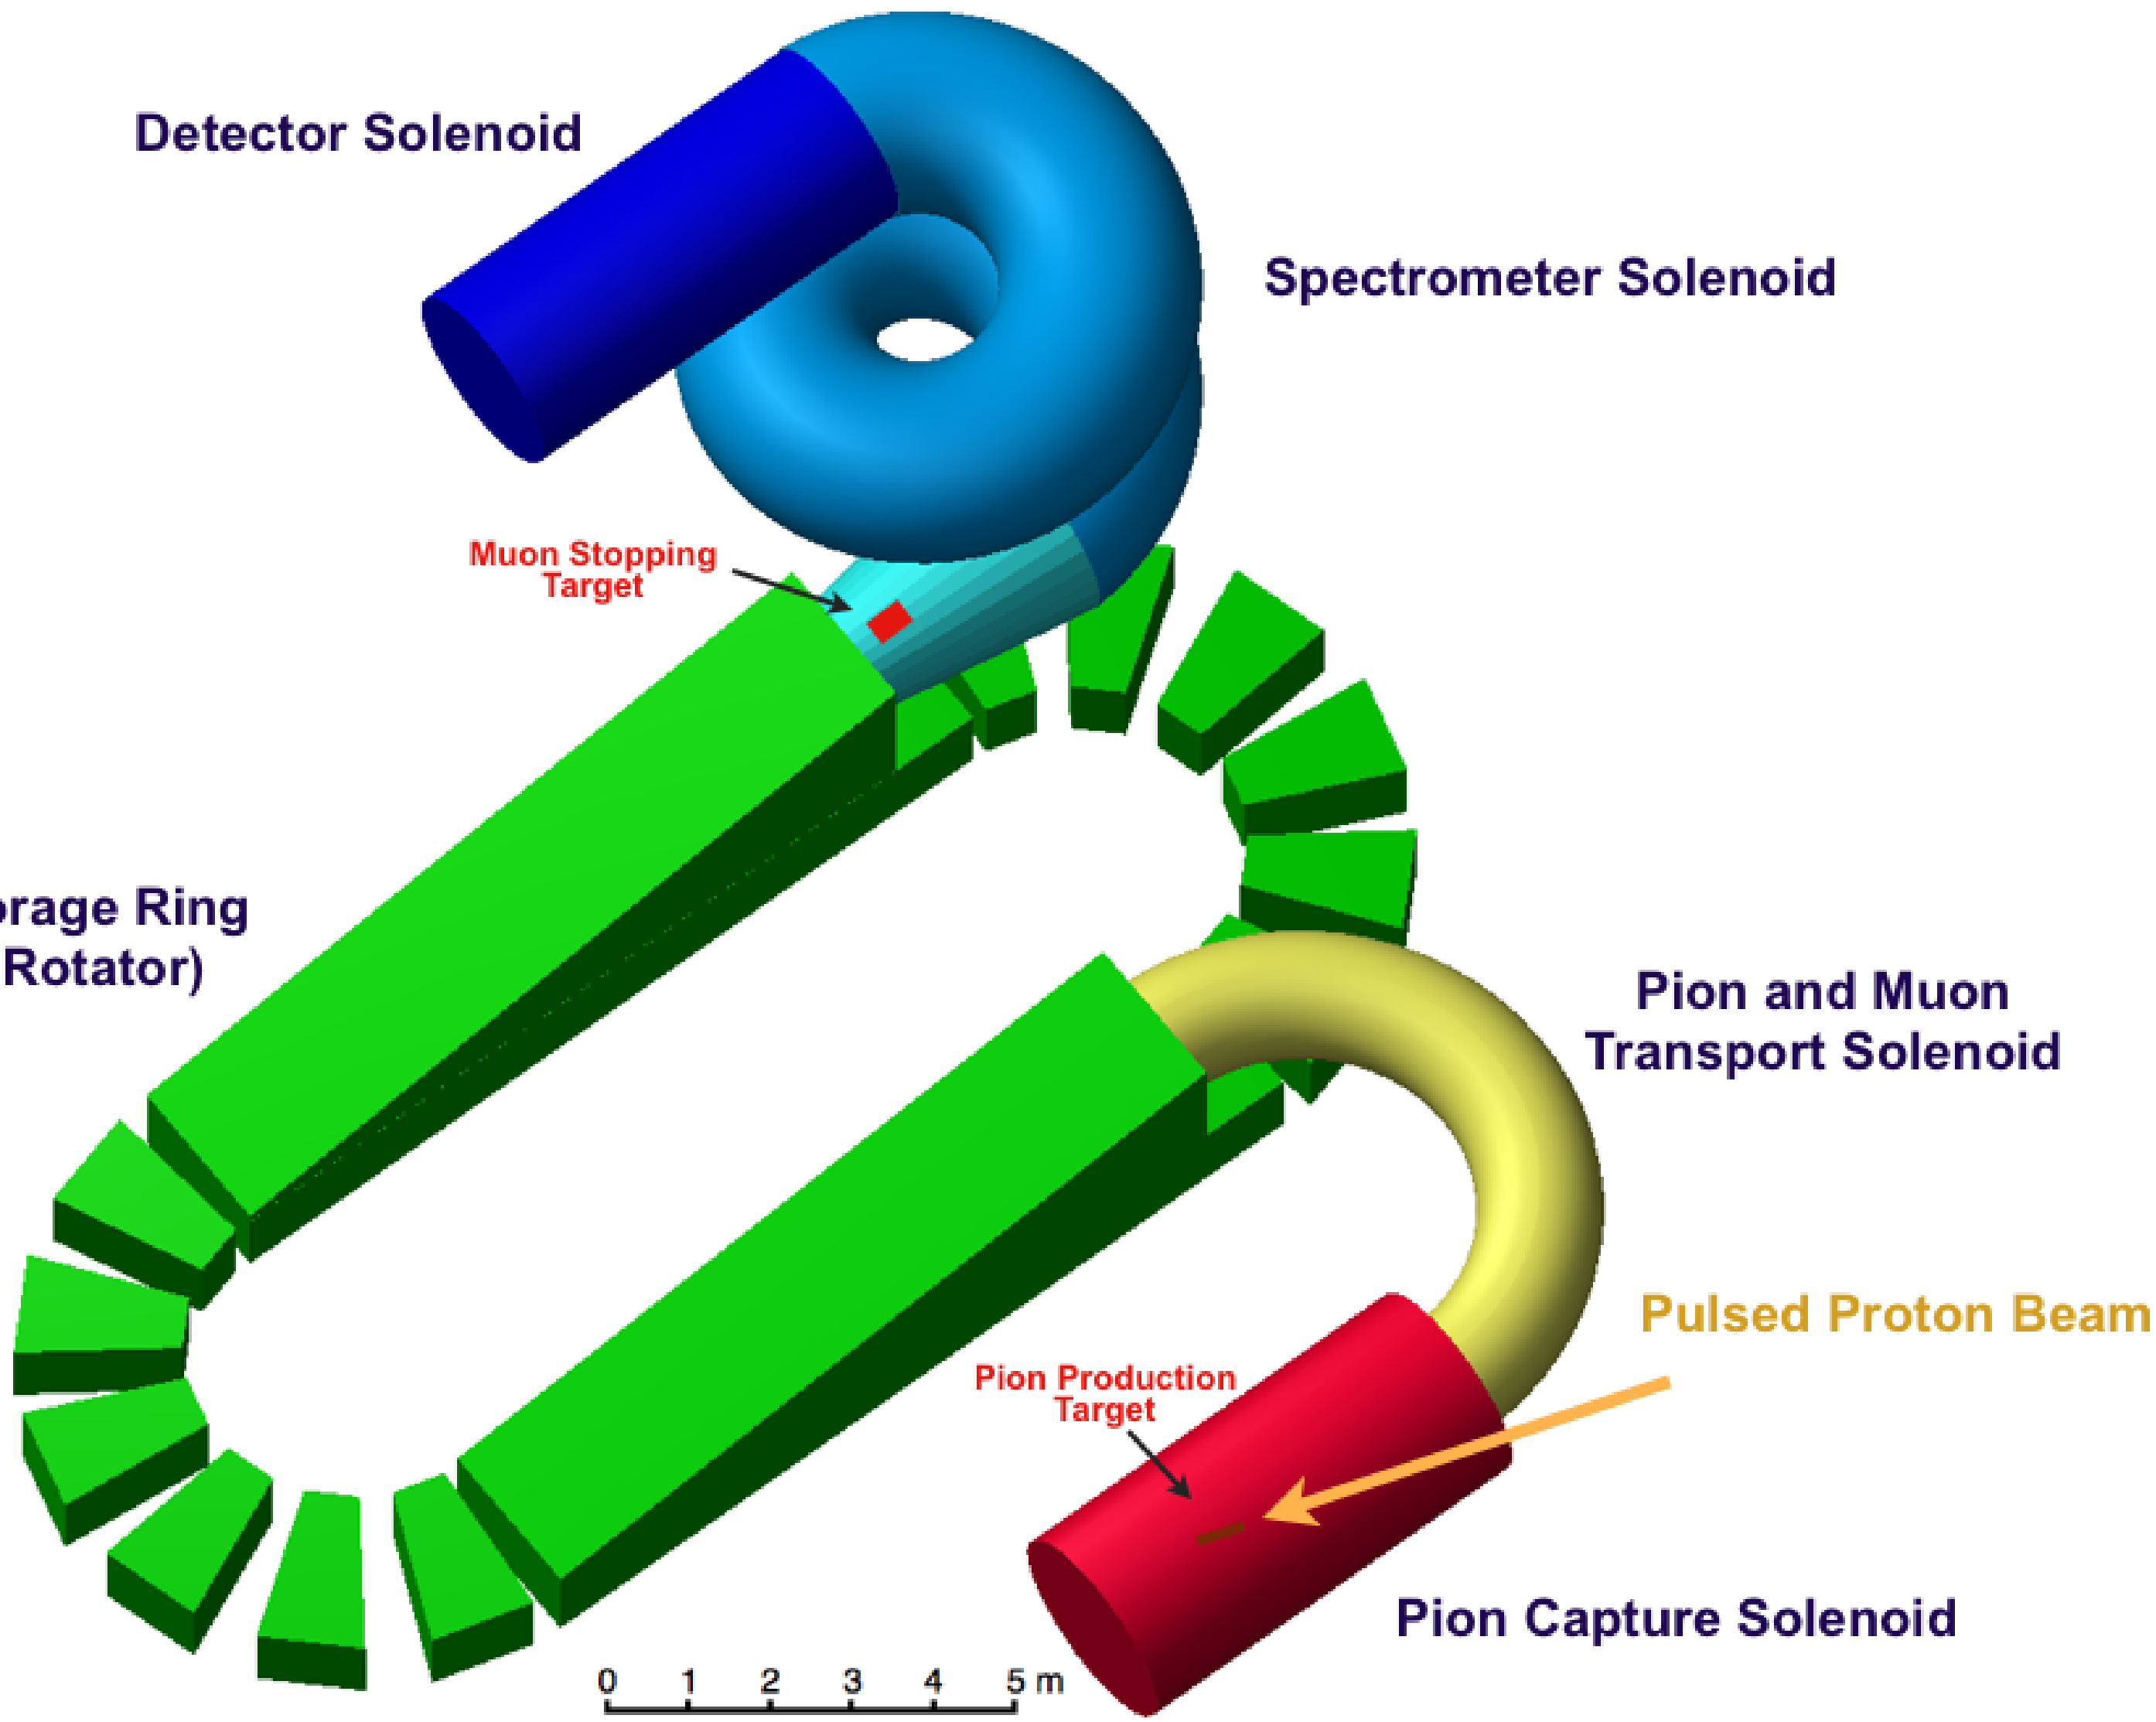

J. Pasternak

Challenges for the PRISM accelerator system

- The need for the compressed proton bunch:
  - is in full synergy with the Neutrino Factory and a Muon Collider.
  - puts PRISM in a position to be one of the incremental steps of the muon programme.
  - opportunities to realise in existing proton drivers (like J-PARC) or future ones (like PIP-II at FNAL).
- Target and capture system:
  - is in full synergy with the Neutrino Factory and a Muon Collider studies.
  - requires a detailed study of the effect of the energy deposition induced by the beam in SC solenoids
- Design of the muon beam transport from the solenoidal capture to the PRISM FFA ring.
  - very different beam dynamics conditions.
  - very large beam emittances and momentum spread.
- Muon beam injection/extraction into/from the FFA ring.
  - very large beam emittances and momentum spread.
  - affects the ring design in order to provide the space and the aperture.
- RF system
  - large gradient at the relatively low frequency and multiple harmonics (the "sawtooth" in shape).

R&D work in Osaka

- 10 cell DFD ring has been designed
- FFA magnet-cell has been constructed and verified.
- RF system has been tested and assembled.
- 6 cell ring was assembled and its optics was verified using α particles.
- Phase rotation was demonstrated for α particles.

A. Sato et al., Conf. Proc. C 0806233, THPP007 (2008)

6 cell FFA ring at RCNP

Magnet for FFA cell - design

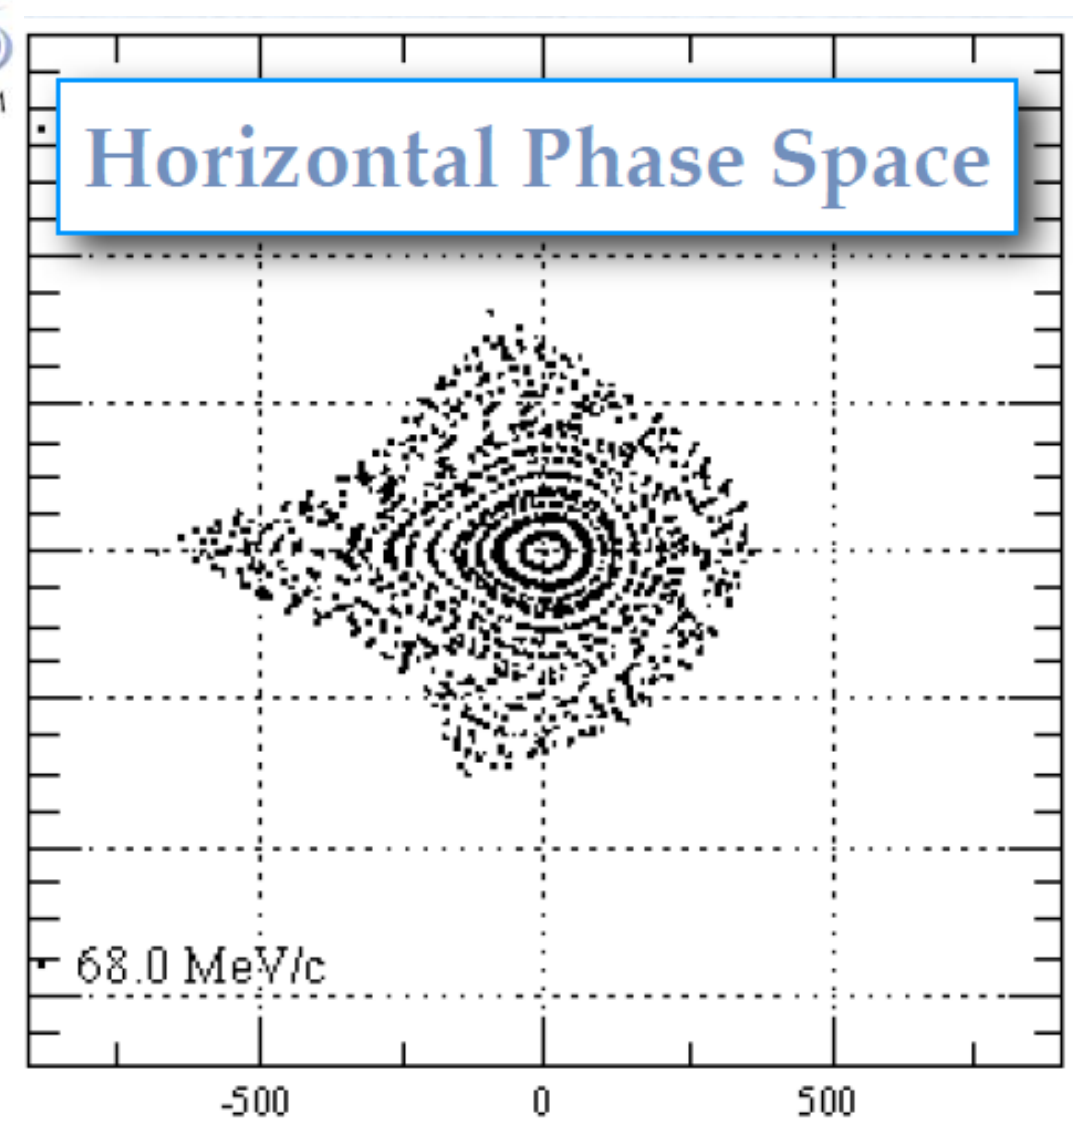

J. Pasternak

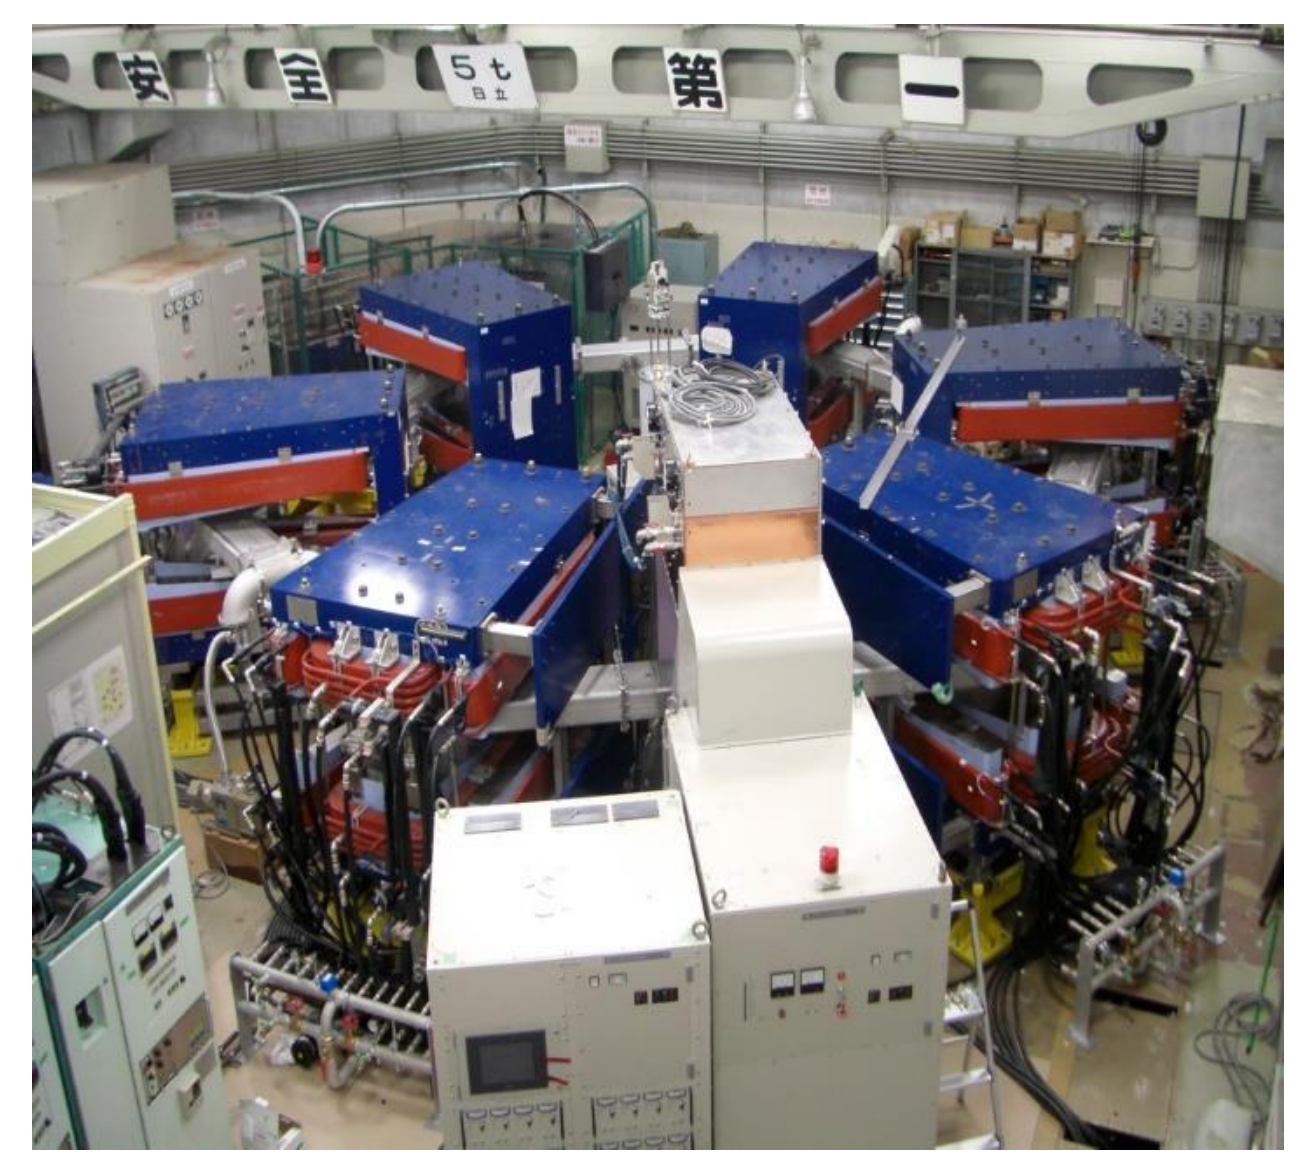

First Design Parameters, A. Sato

PRISM-FFA

- N=10
- k=4.6
- F/D(BL)=6.2
- r0=6.5m for 68MeV/c
- half gap = 17cm
- mag. size 110cm @ F center
- Radial sector DFD Triplet
- $\theta_F/2$=2.2deg
- θ_D=1.1deg
- Max. field
- F : 0.4T
- D : 0.065T
- tune
- h : 2.73
- v : 1.58

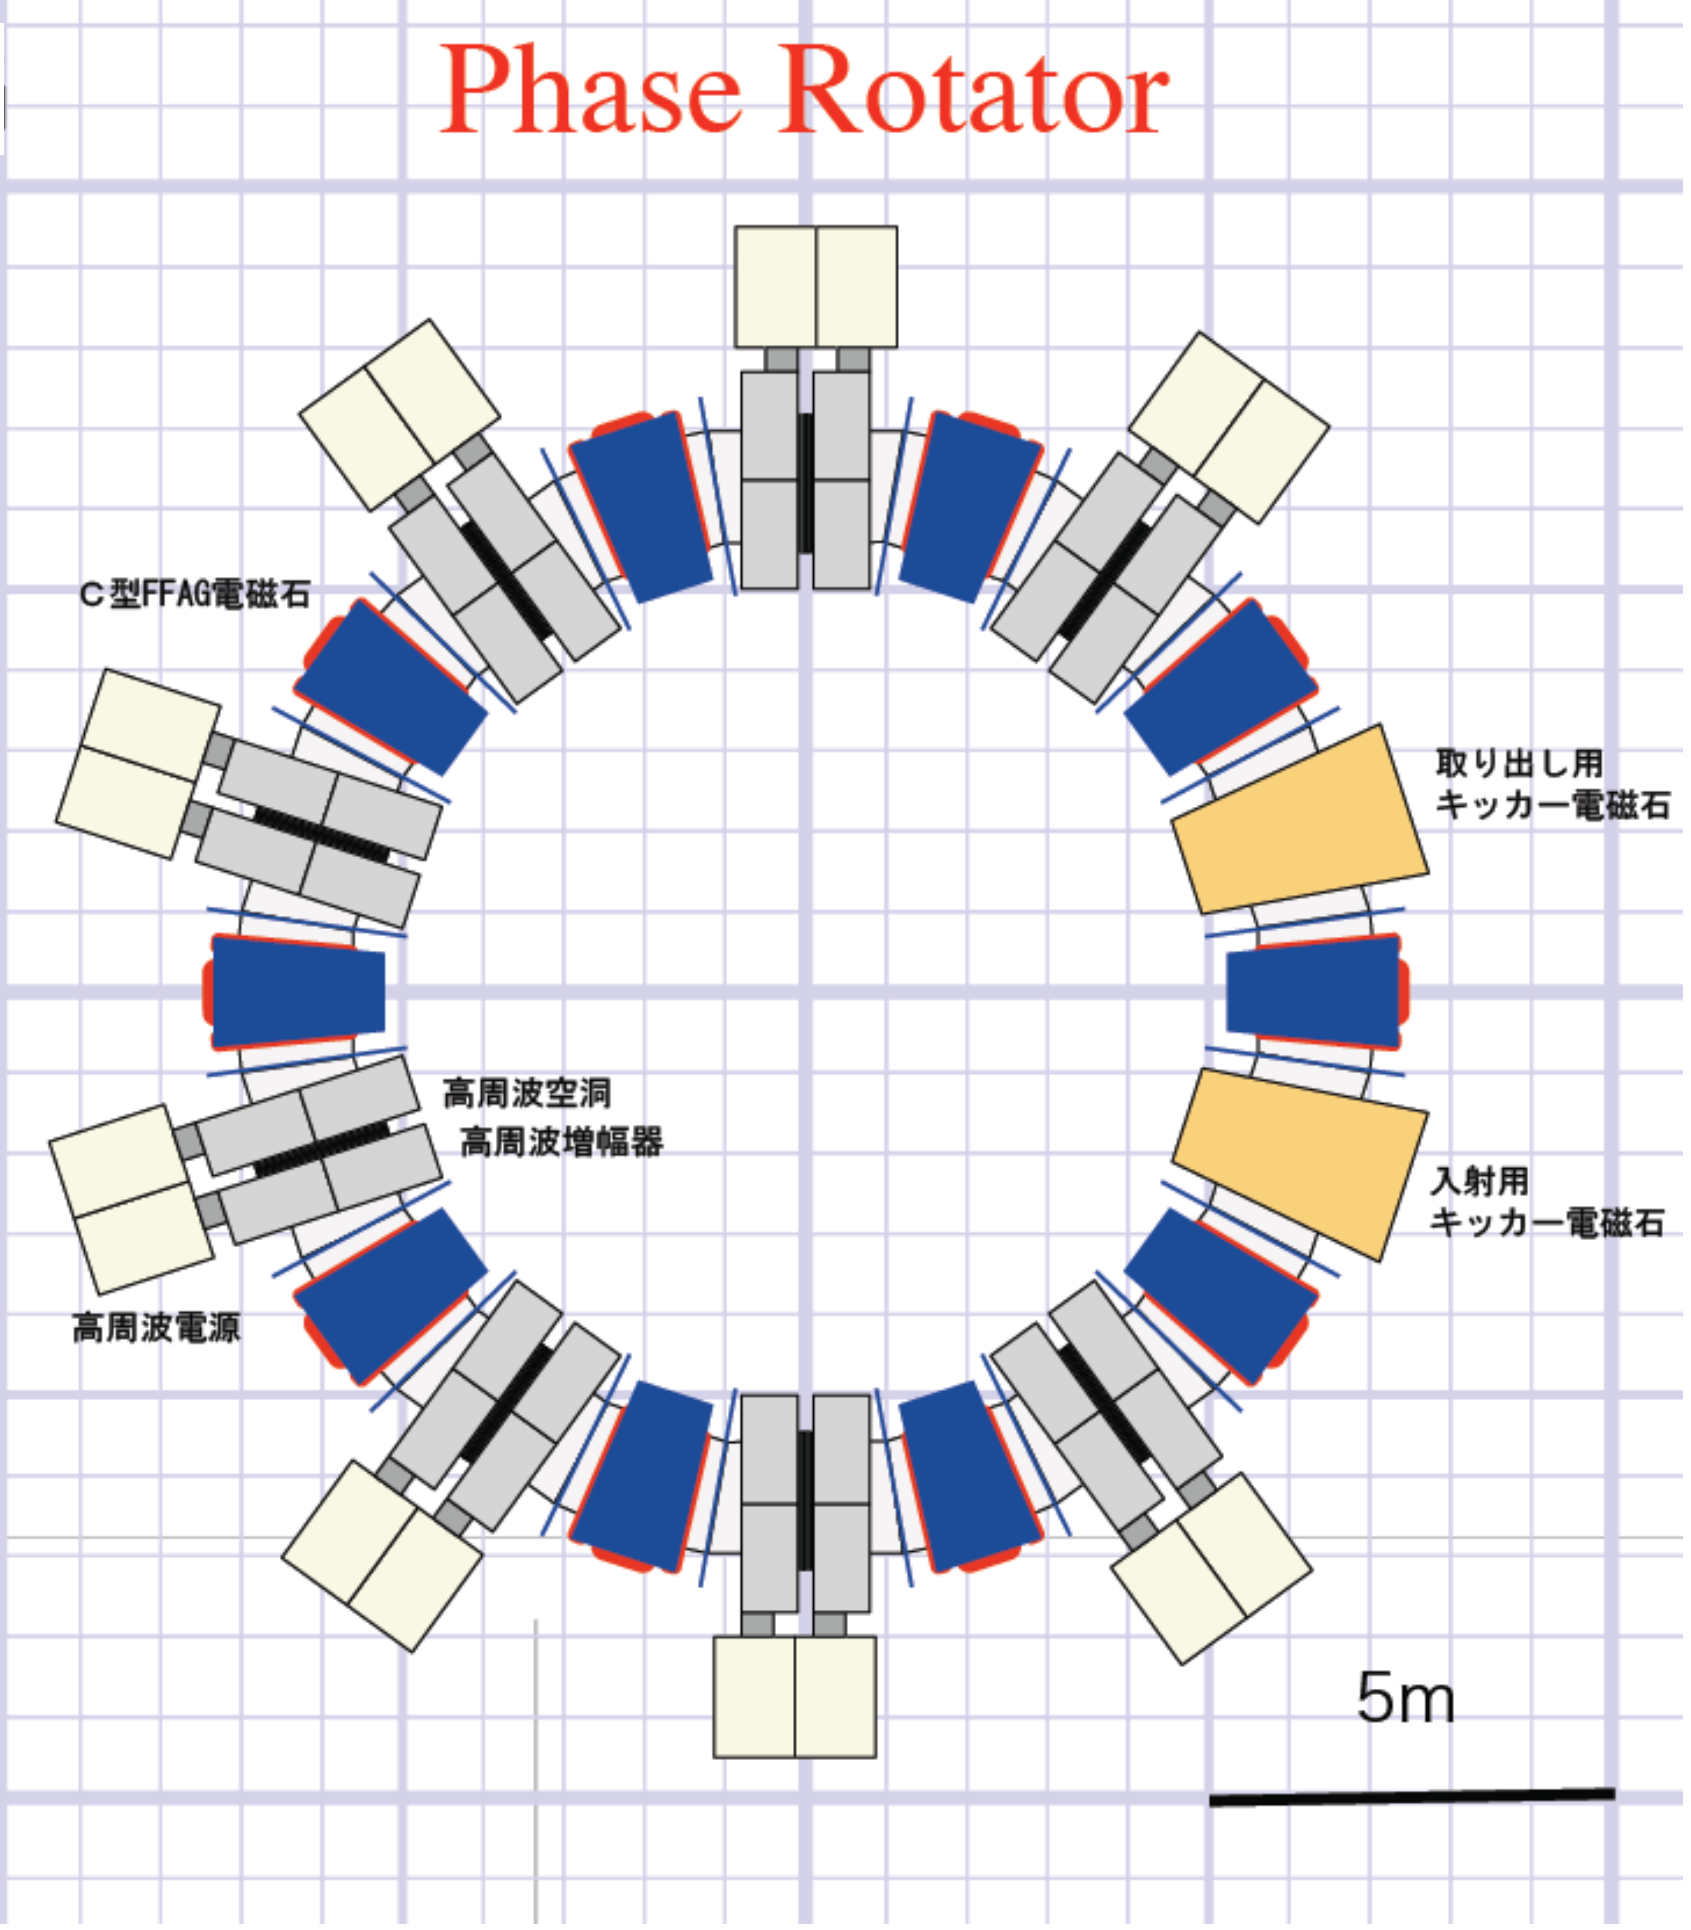

V per turn ~2-3 MV

Δp/p at injection = ± 20%

Δp/p at extraction = ± 2% (after 6 turns ~ 1.5 us)

h=1

PRISM parameters

Parameter	Value
Target type	solid
Proton beam power	~1 MW
Proton beam energy	~ GeV
Proton bunch duration	~10 ns total
Pion capture field	10 -20 T
Momentum acceptance	±20 %
Reference μ^-momentum	40-68 MeV/c
Harmonic number	1
Minimal acceptance (H/V)	3.8/0.5 π cm rad or more…
RF voltage per turn	3-5.5 MV
RF frequency	3-6 MHz
Final momentum spread	±2%
Repetition rate	100 Hz-1 kHz

Baseline FDF scaling FFA design

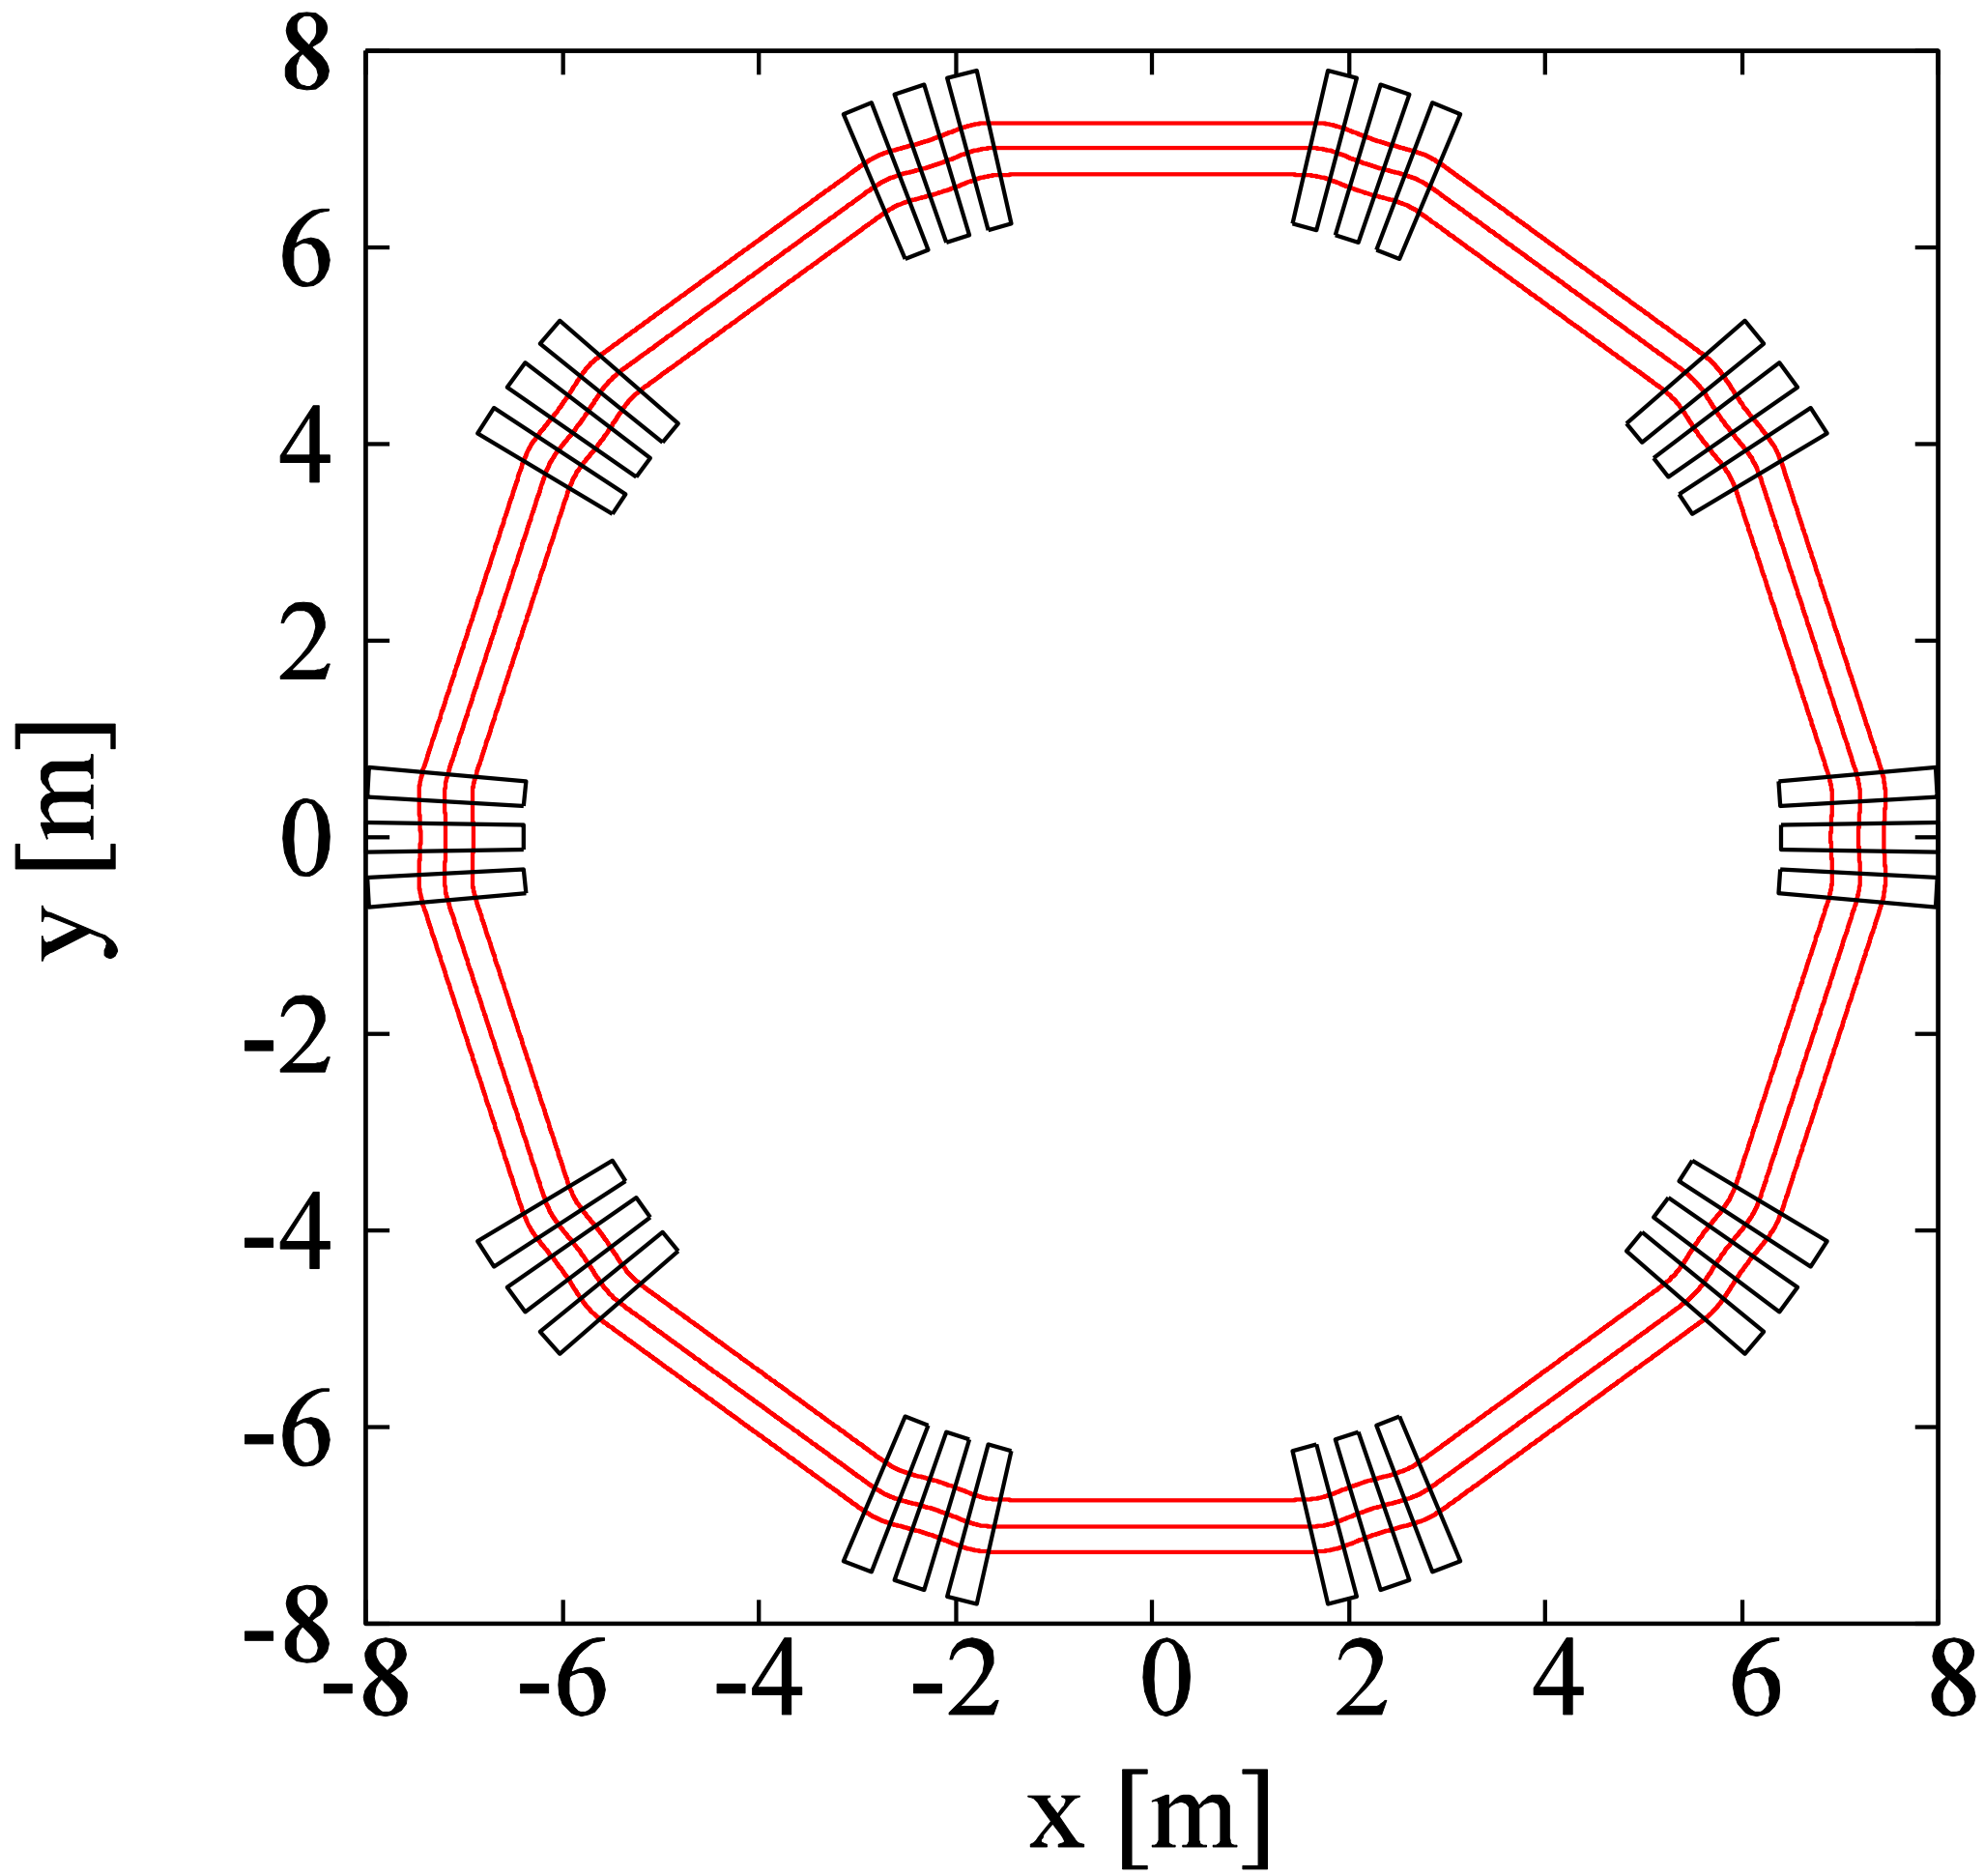

- FDF symmetry motivated by the success of ERIT at Kyoto University
- 10 cells
- k 4.3
- R_0 7.3 m
- (Q_H, Q_V) (2.45, 1.85)
- Minimal drift length 3m

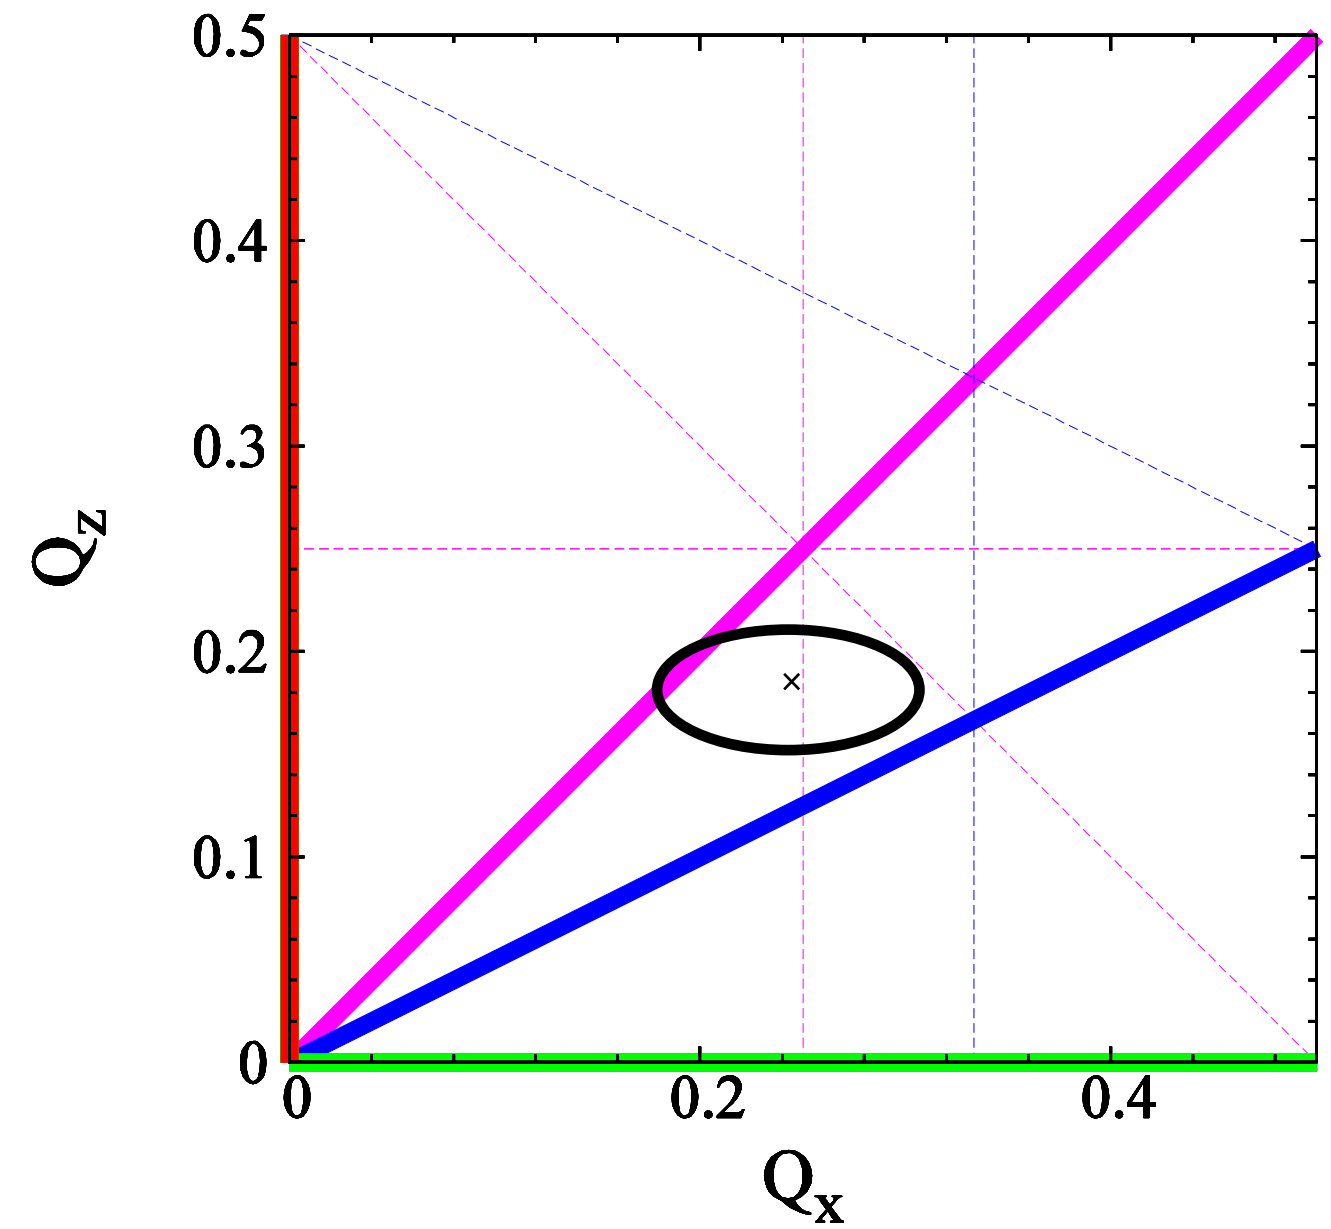

Baseline FDF scaling FFA design (2)

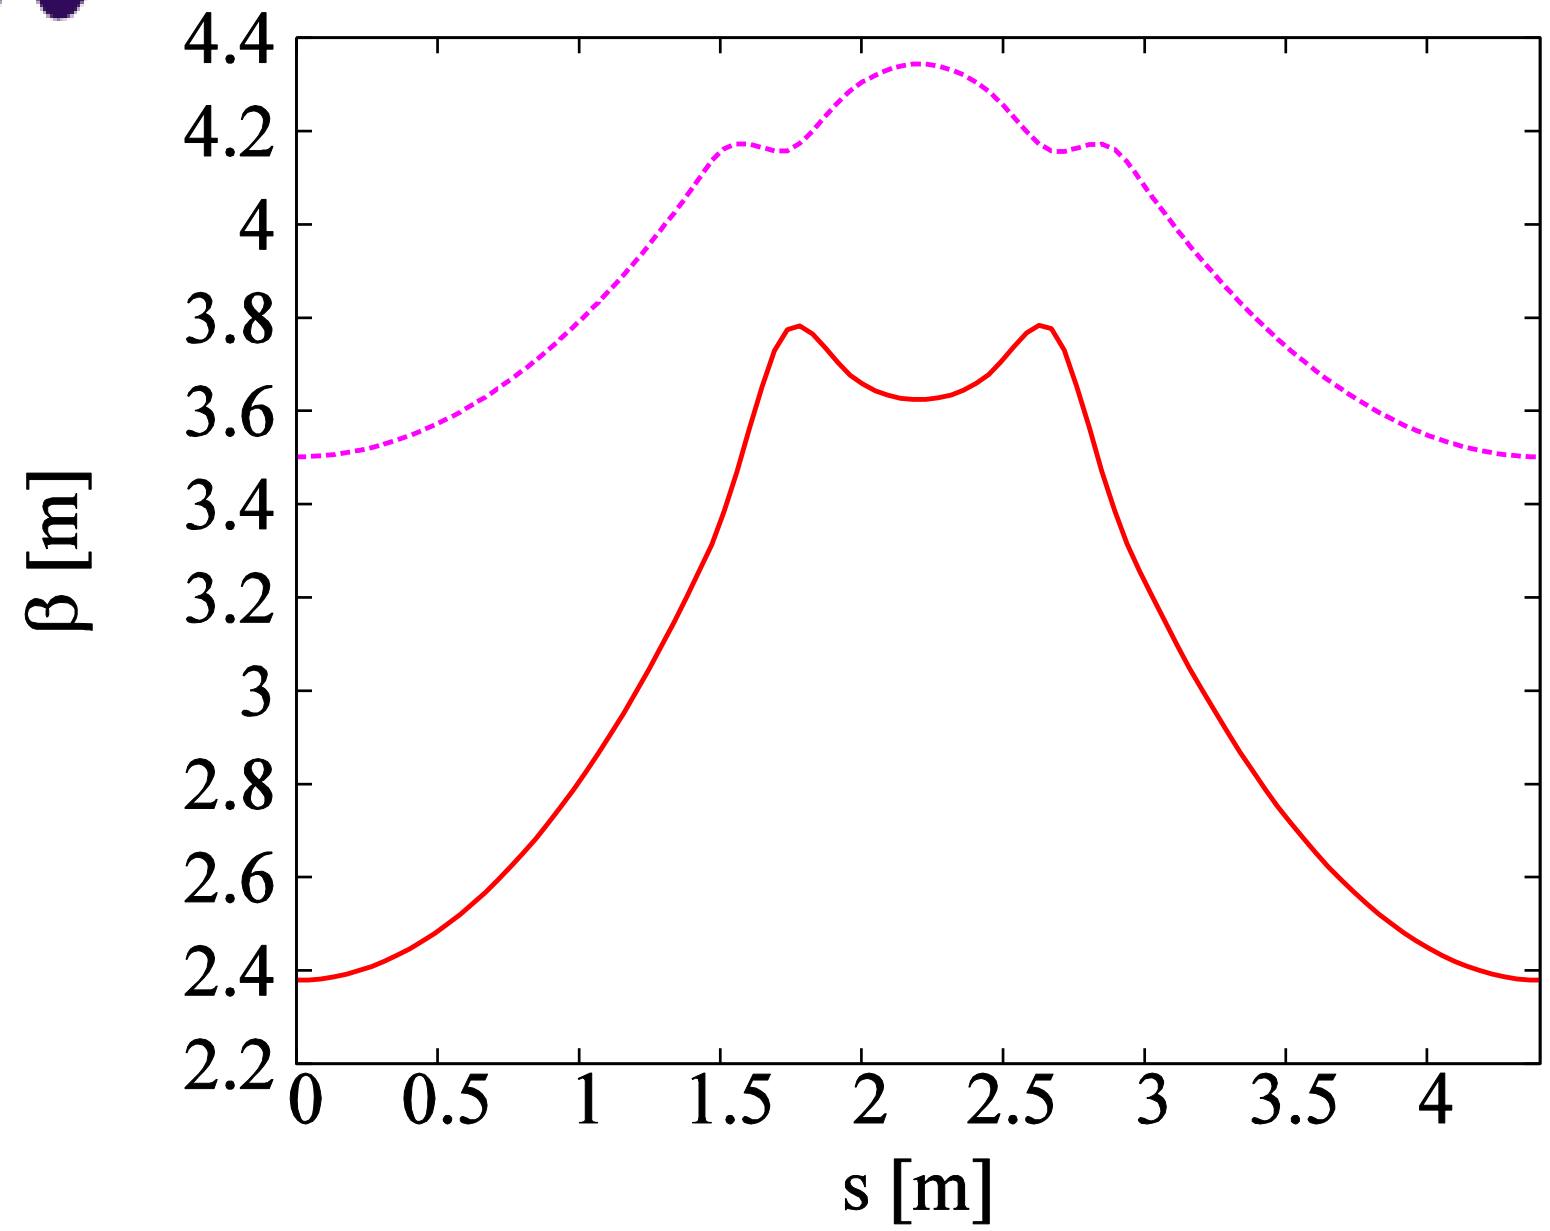

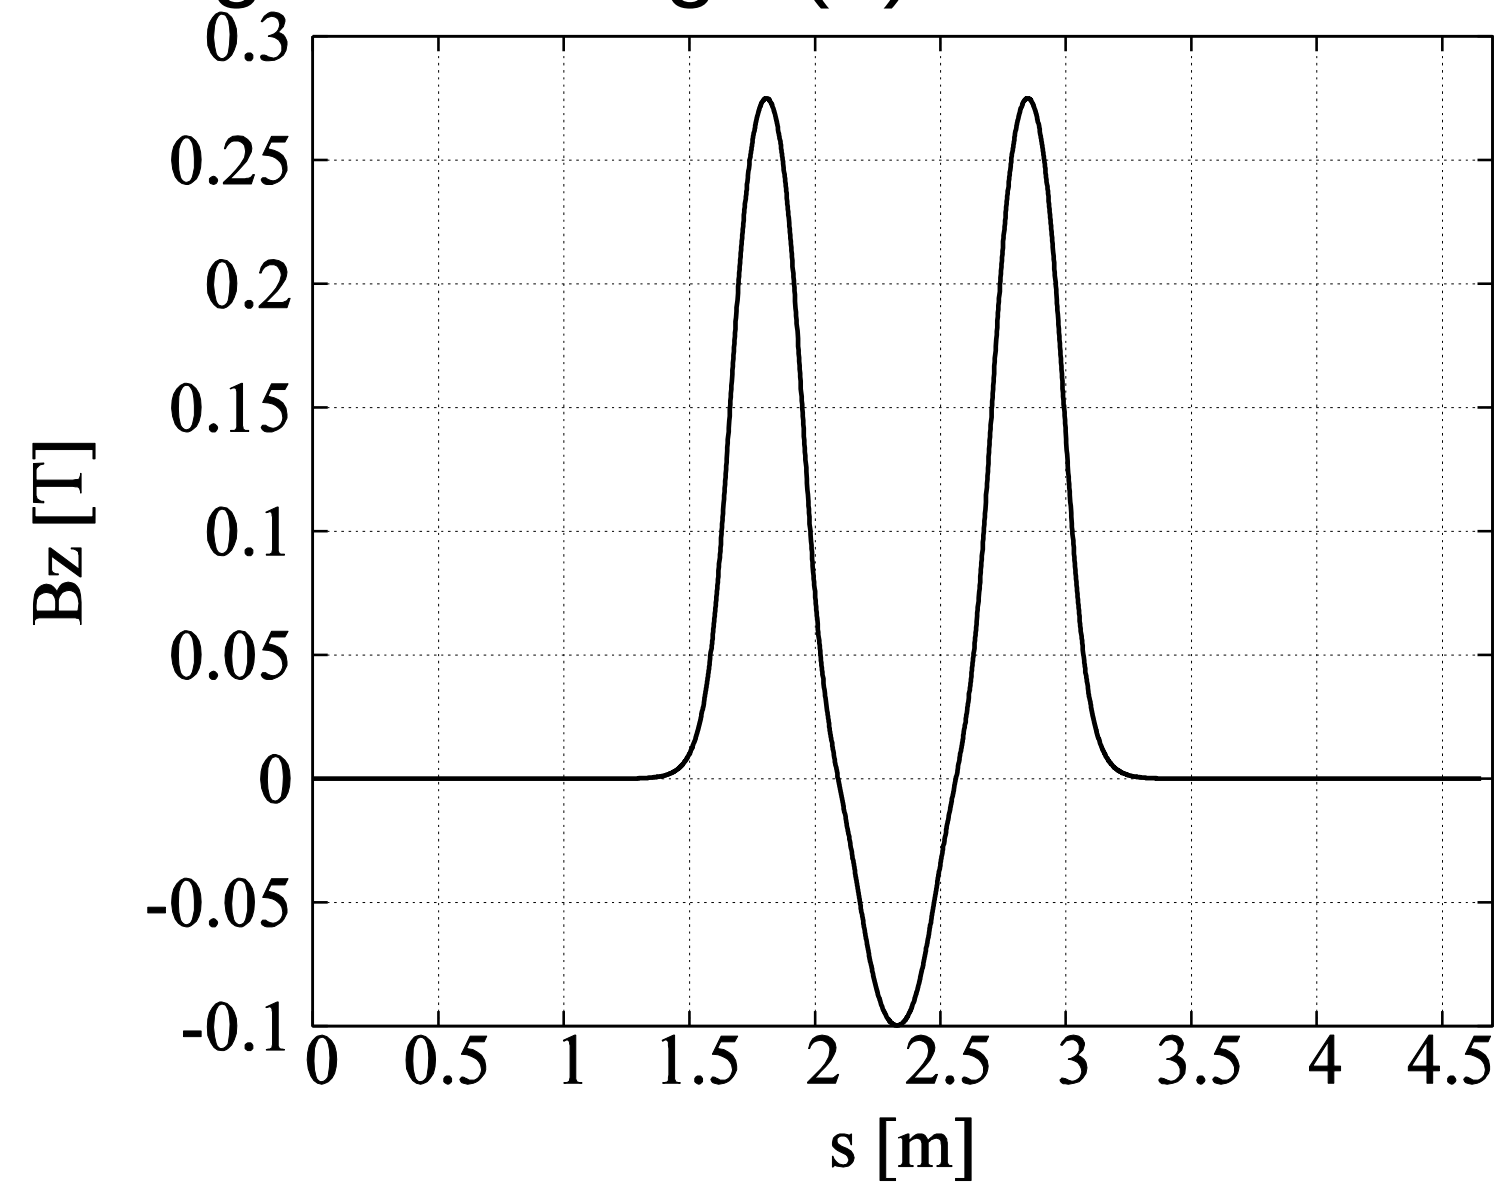

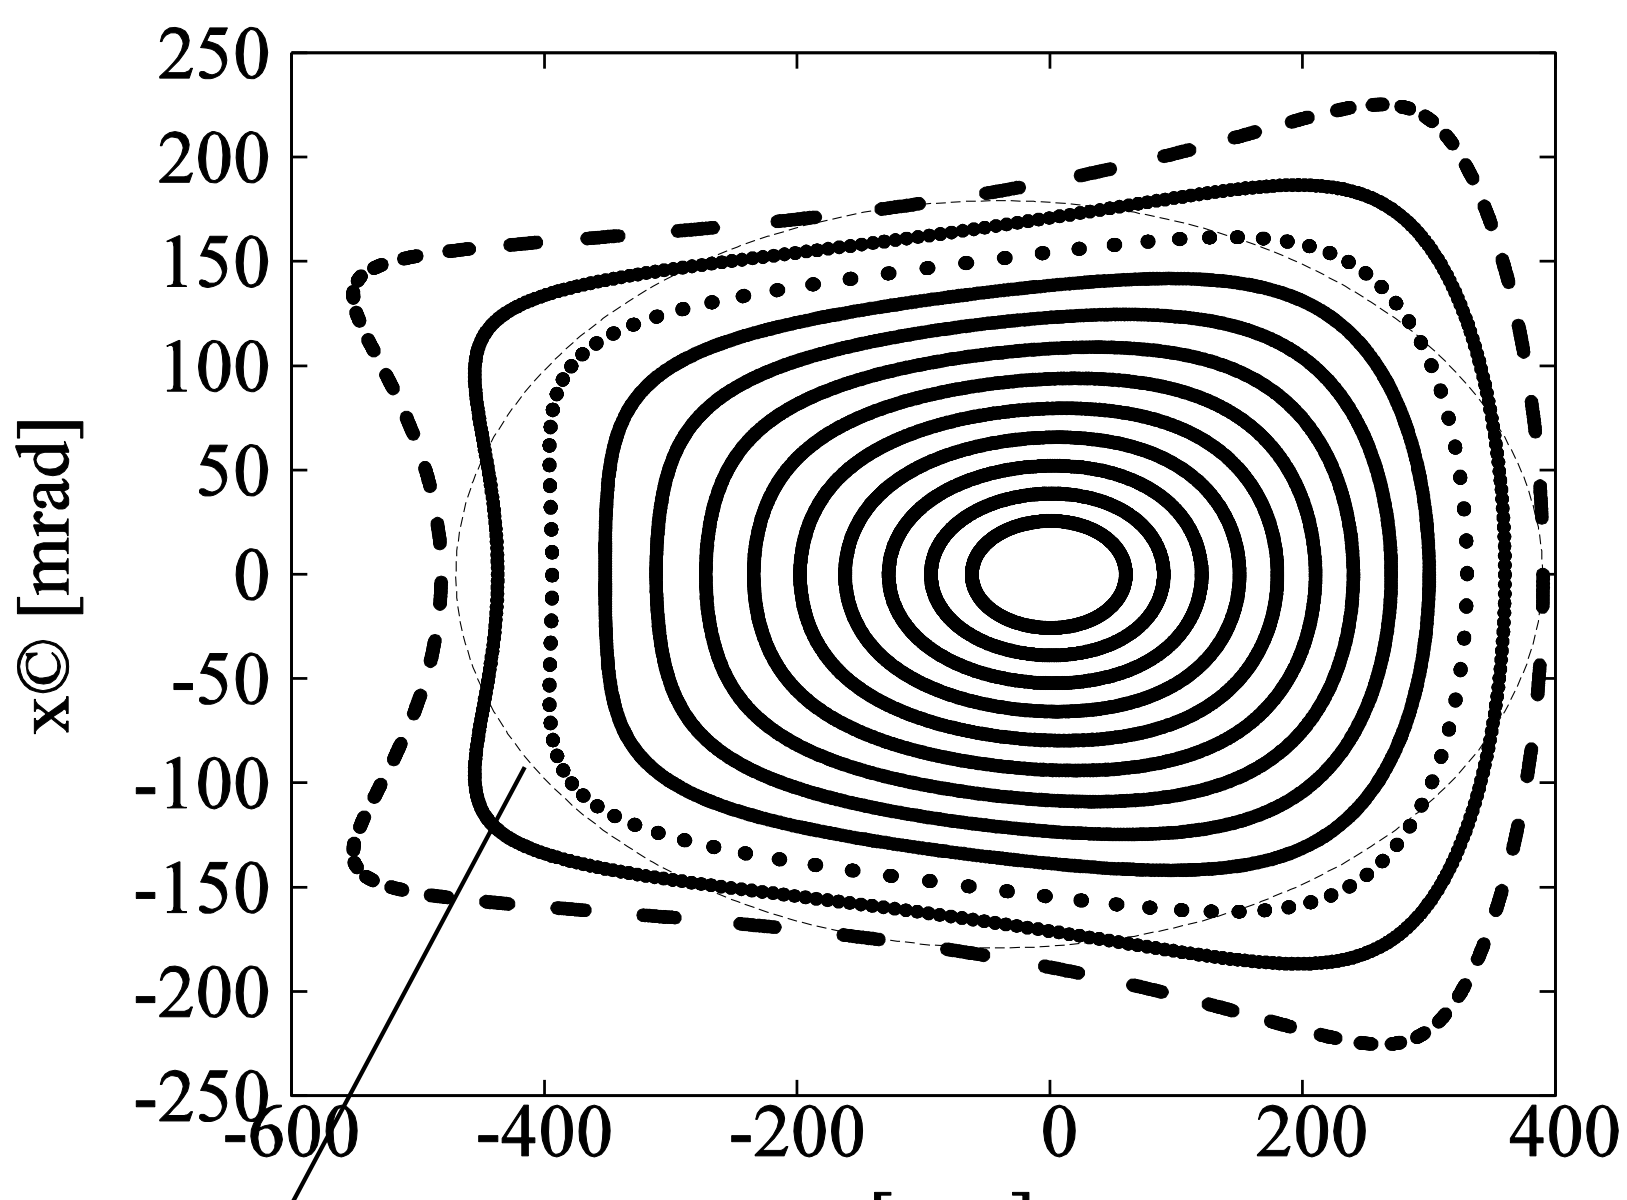

- Enge field fall-off used to study fringe fields using FixField code
- Enormous horizontal acceptance is achieved in simulations
- Vertical long term stability of ~3000 π.mm.mrad is achieved, however with some optimization ~5000 π.mm.mrad should be stable for a few turns.
- Further optimisation will be performed

J. Pasternak

Selected Snowmass'21 submissions

- A Phase Rotated Intense Source of Muons (PRISM) for a μ→e Conversion Experiment, SNOWMASS21-RF5_RF0-AF5_AF0_J_Pasternak-096.pdf
- Bunch Compressor for the PIP-II Linac, SNOWMASS21-AF5_AF0-RF5_RF0_Prebys-071.pdf
- SNOWMASS21-RF5_RF0-AF5_AF0_Robert_Bernstein-027.pdf

A Phase Rotated Intense Source of Muons (PRISM) for a $\mu \rightarrow e$ Conversion Experiment

R. B. Appleby,[1,2] M. Aslaninejad,[3] R. Barlow,[4] R.H. Bernstein,[5] B. Echenard,[6] A. Gaponenko,[5] D. J. Kelliher,[7] Y. Kuno,[8,9] A. Kurup,[10] J.-B. Lagrange,[7] M. Lancaster,[1] K. Long,[10] K. Lynch,[11] S. Machida,[7] S. Mihara,[12] Y. Mori,[13] B. Muratori,[14,2] J. Pasternak,[10,7,*] E. Prebys,[15] C. R. Prior,[7] A. Sato,[8] D. Stratakis,[5] S. Tygier,[1,2] and Y. Uchida[10]

[1] *The University of Manchester, Department of Physics and Astronomy, Oxford Road, Manchester, M13 9PL, United Kingdom*
[2] *Cockcroft Institute, Sci-Tech Daresbury, Keckwick Lane, Daresbury, Warrington, WA4 4AD, United Kingdom*
[3] *School of Particles and Accelerators, Institute for Research in Fundamental Sciences (IPM), P.O. Box 19395-5531, Tehran, Iran*
[4] *The University of Huddersfield, Queensgate, Huddersfield, HD1 3DH, UK*
[5] *Fermi National Accelerator Laboratory, P.O. Box 500, Batavia, IL 60510, USA*
[6] *California Institute of Technology, Pasadena, California 91125 USA*
[7] *ISIS, STFC Rutherford Appleton Laboratory, Didcot OX11 0QX, UK*
[8] *Graduate School of Science, Osaka University, 1-1 Machikaneyama, Toyonaka, Osaka, 560-0043, Japan*
[9] *Research Center of Nuclear Physics, Osaka University, 1-1 Yamadaoka, Suita, Osaka, 565-0871, Japan*
[10] *Imperial College London, Exhibition Road, London SW7 2AZ, UK*
[11] *York College and the Graduate Center, CUNY, New York, NY 11451, USA*
[12] *Institute of Particle and Nuclear Studies (IPNS), KEK, Tsukuba, Ibaraki, 305-0801, Japan*
[13] *Institute for Integrated Radiation and Nuclear Science Department of Nuclear Engineering, Kyoto University, Kyoto, Japan*
[14] *ASTeC, STFC Daresbury Laboratory, Daresbury, Warrington, WA4 4AD Cheshire, United Kingdom*
[15] *UC Davis, Department of Physics and Astronomy, One Shields Avenue Davis, CA 95616*
(Dated: September 1, 2020)

Letter of Interest: Bunch Compressor for the PIP-II Linac

E. Prebys[1], R. H. Bernstein[2], and J. Pasternak[3]

[1]University of California, Davis, California 95616, USA
[2]Fermi National Accelerator Laboratory, Batavia, Illinois 60510, USA
[3]Imerial College London, London SW7 2AZ, UK

August 27, 2020

A New Charged Lepton Flavor Violation Program at Fermilab

(ENIGMA: nExt geNeration experIments with hiGh intensity Muon beAms)

M. Aoki,[1] R.H. Bernstein,[2] L. Calibbi,[3] F. Cervelli,[4] C. Bloise,[5] R. Culbertson,[2] André Luiz de Gouvêa,[6] S. Di Falco,[4] E. Diociaiuti,[5] S. Donati,[4] R. Donghia,[5] B. Echenard,[7] A. Gaponenko,[2] S. Giovannella,[5] C. Group,[8] F. Happacher,[5] M. Hedges,[9] D.G. Hitlin,[7] C. Johnstone,[2] E. Hungerford,[10] D. M. Kaplan,[11] M. Kargiantoulakis,[2] A. Knecht,[12] K. Kirch,[13] M. Lancaster,[14] A. Luca,[2] K. Lynch,[15] M. Martini,[16,*] P. Murat,[2] S. Middleton,[7] S. Mihara,[17] J. Miller,[18] S. Miscetti,[5] L. Morescalchi,[4] D. Neuffer,[2] A. Papa,[4] J. Pasternak,[19] E. Pedreschi,[4] G. Pezzullo,[20] F. Porter,[7] E. Prebys,[21] V. Pronskikh,[2] R. Ray,[2] F. Renga,[22] I. Sarra,[5] D. Stratakis,[2] N.M. Truong,[21] A. Sato,[1] F. Spinella,[4] M. Syphers,[23] and M. Yucel[2]

[1] *Graduate School of Science, Osaka University, 1-1 Machikaneyama, Toyonaka, Osaka, 560-0043, Japan*
[2] *Fermi National Accelerator Laboratory, P.O. Box 500, Batavia, IL 60510, USA*[†]
[3] *School of Physics, Nankai University, Tianjin 300071, China*
[4] *INFN Sezione di Pisa Ed. C Polo Fibonacci, Largo Pontecorvo 3, Pisa, Italy*
[5] *Laboratori Nazionali di Frascati dell'INFN, Via Enrico Fermi 40, 00044, Frascati, Italy*
[6] *Northwestern University, Department of Physics and Astronomy, 2145 Sheridan Road, Evanston, IL 60208, USA*
[7] *California Institute of Technology, Pasadena, California 91125 USA*
[8] *Department of Physics, University of Virginia, Charlottesville, Virginia 22904, USA*
[9] *Department of Physics and Astronomy, 525 Northwestern Avenue, West Lafayette, IN 47907, USA*
[10] *Department of Physics, University of Houston, Houston TX, 77204 USA*
[11] *Illinois Institute of Technology, 10 West 35th Street Chicago, IL 60616, USA*
[12] *Paul Scherrer Institute, Villigen, Switzerland*
[13] *ETH Zurich Dep. Physik Otto-Stern-Weg 1, 8093 Zurich, Switzerland*[‡]
[14] *The University of Manchester, Department of Physics and Astronomy, Oxford Road, Manchester, M13 9PL, United Kingdom*
[15] *York College and the Graduate Center, CUNY, New York, NY 11451, USA*
[16] *Università degli Studi Guglielmo Marconi, 00193, Rome, Italy*
[17] *KEK, High Energy Accelerator Research Organization, 1-1 Oho, Tsukuba, Ibaraki 305-0801, Japan*
[18] *Boston University, 590 Commonwealth Ave., Boston MA 02215, USA*
[19] *Imperial College London, Exhibition Road, London SW7 2AZ, UK*[§]
[20] *Department of Physics, Yale University, 56 Hillhouse, New Haven, CT-06511, USA*
[21] *UC Davis, Department of Physics and Astronomy, One Shields Avenue Davis, CA 95616*
[22] *Istituto Nazionale di Fisica Nucleare, Sez. di Roma, P. le A. Moro 2, 00185 Roma, Italy*
[23] *Northern Illinois University, DeKalb, IL 60115, USA*[¶]
(Dated: August 29, 2020)

Realising compressed bunches using PIP-II linac

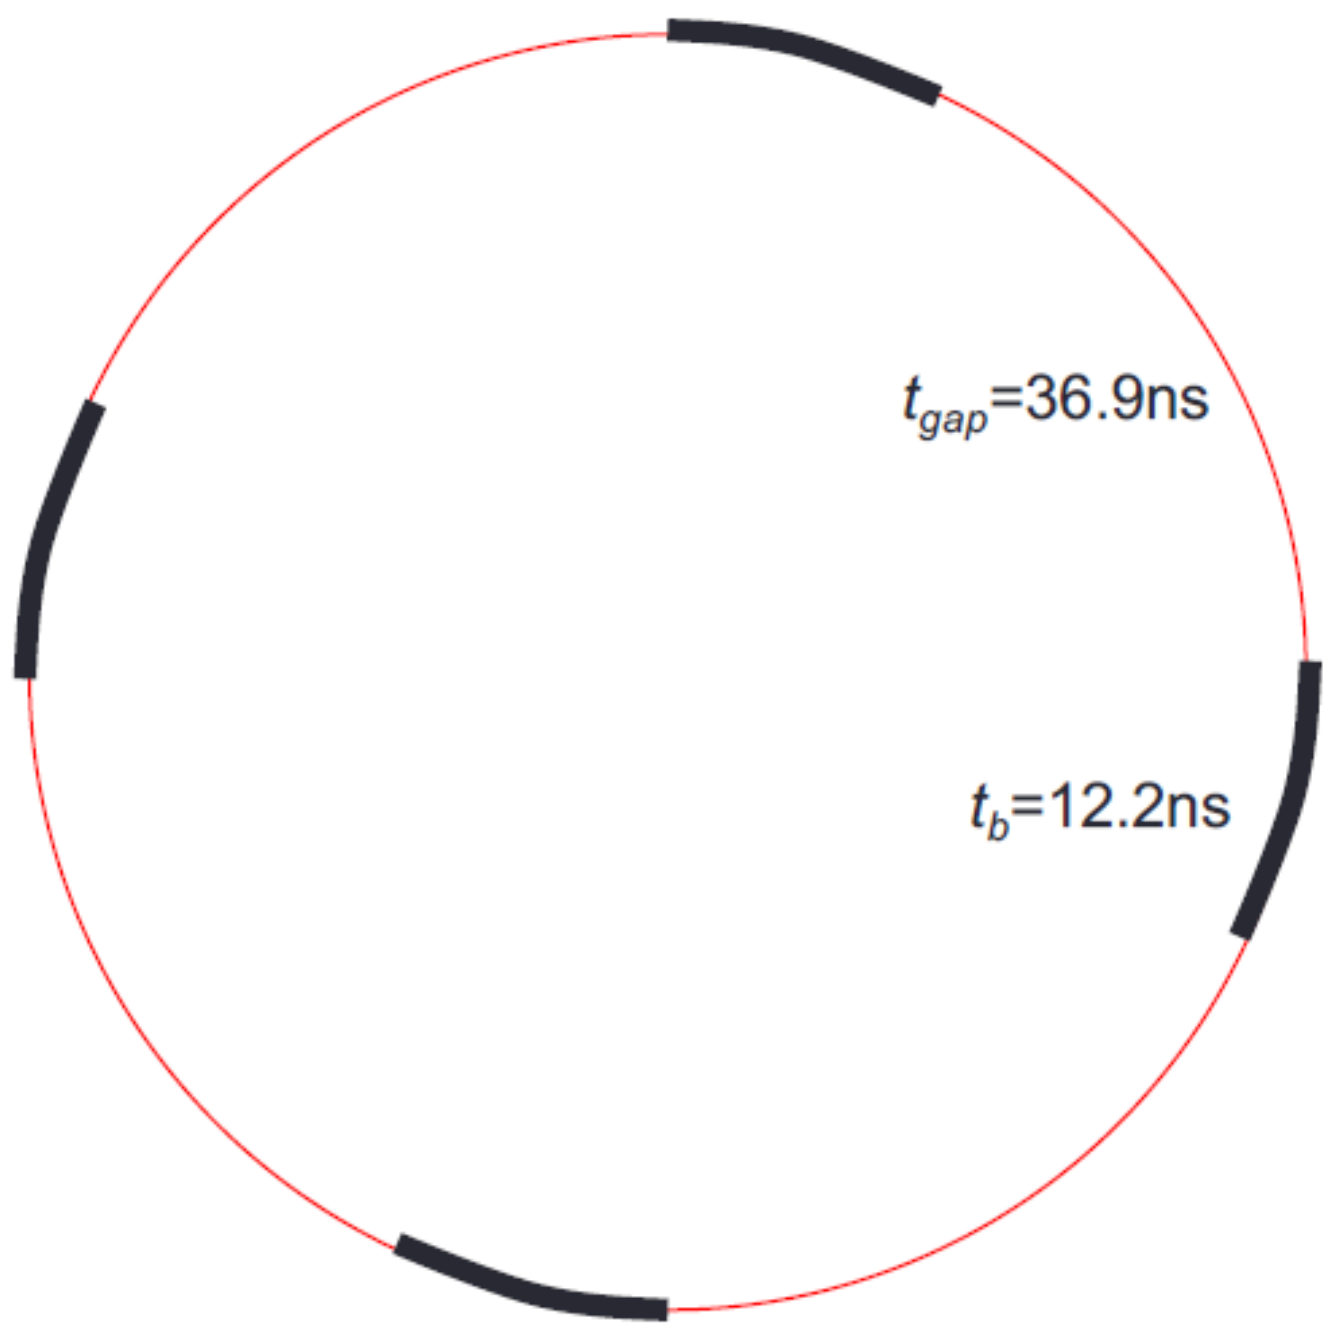

Circumference: $C = 49.7$ m

RF Frequency: $f_{RF} = 40.62$ or 20.31 MHz

harmonic: $h = 8$ or 4

Protons/bunch: $n_b = 1 \times 10^{12}$

Bunch length: $t_b = 12.2$ ns

Fill time: $t_{fill} = 1.3$ ms

- PIP-II linac can be used to generate the compressed bunches
- Compressor ring needs to be added

- Bunch Compressor for the PIP-II Linac, SNOWMASS21-AF5_AF0-RF5_RF0_Prebys-071.pdf

Vertical injection into FFA

Orbit separation with 2 kickers

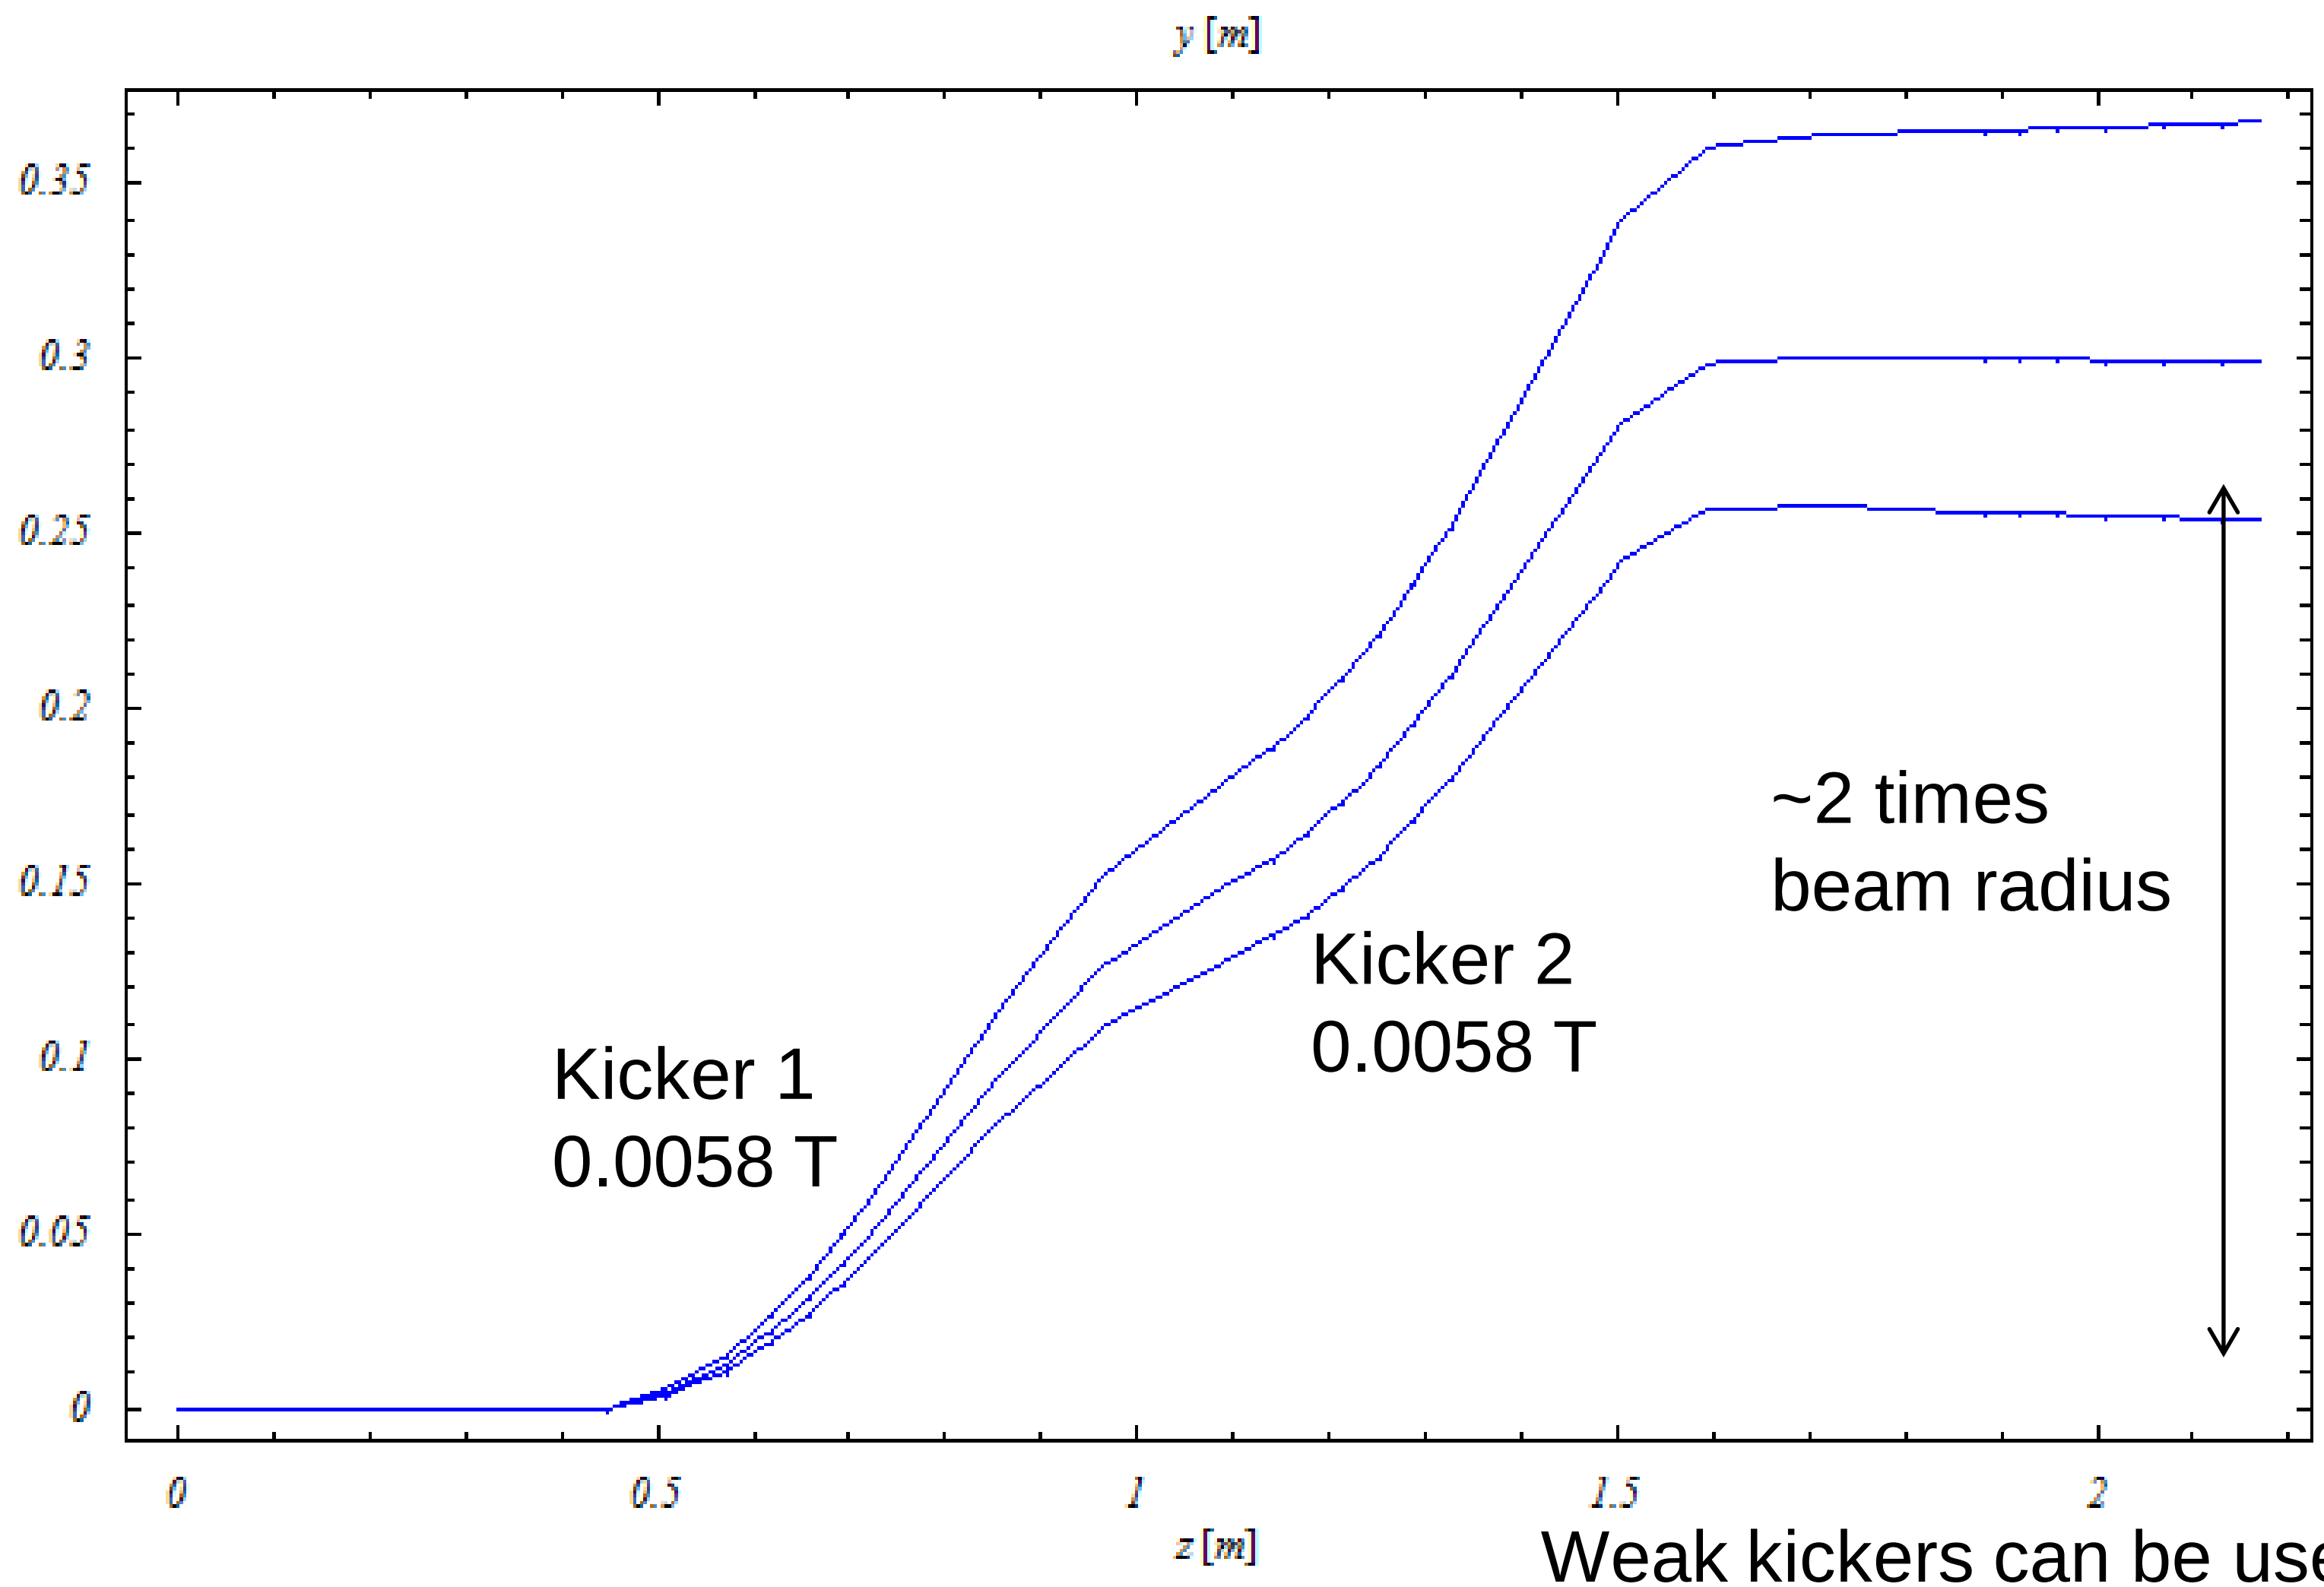

Weak kickers can be used!

J. Pasternak

New concepts for injection

- Beam from the solenoid enters dispersion creator made of rectangular dipoles
- FFA matching section matches betatron functions, while preserving dispersion
- Horizontal deflectors (two sector bends) allows to pass around the main FFA magnets while entering into the FFA ring
    - Dispersion flips
- Vertical magnets allows to create the necessary gap for the horizontal deflectors and match the vertical dispersion
- System under study/work in progress (R. Feng, IC)

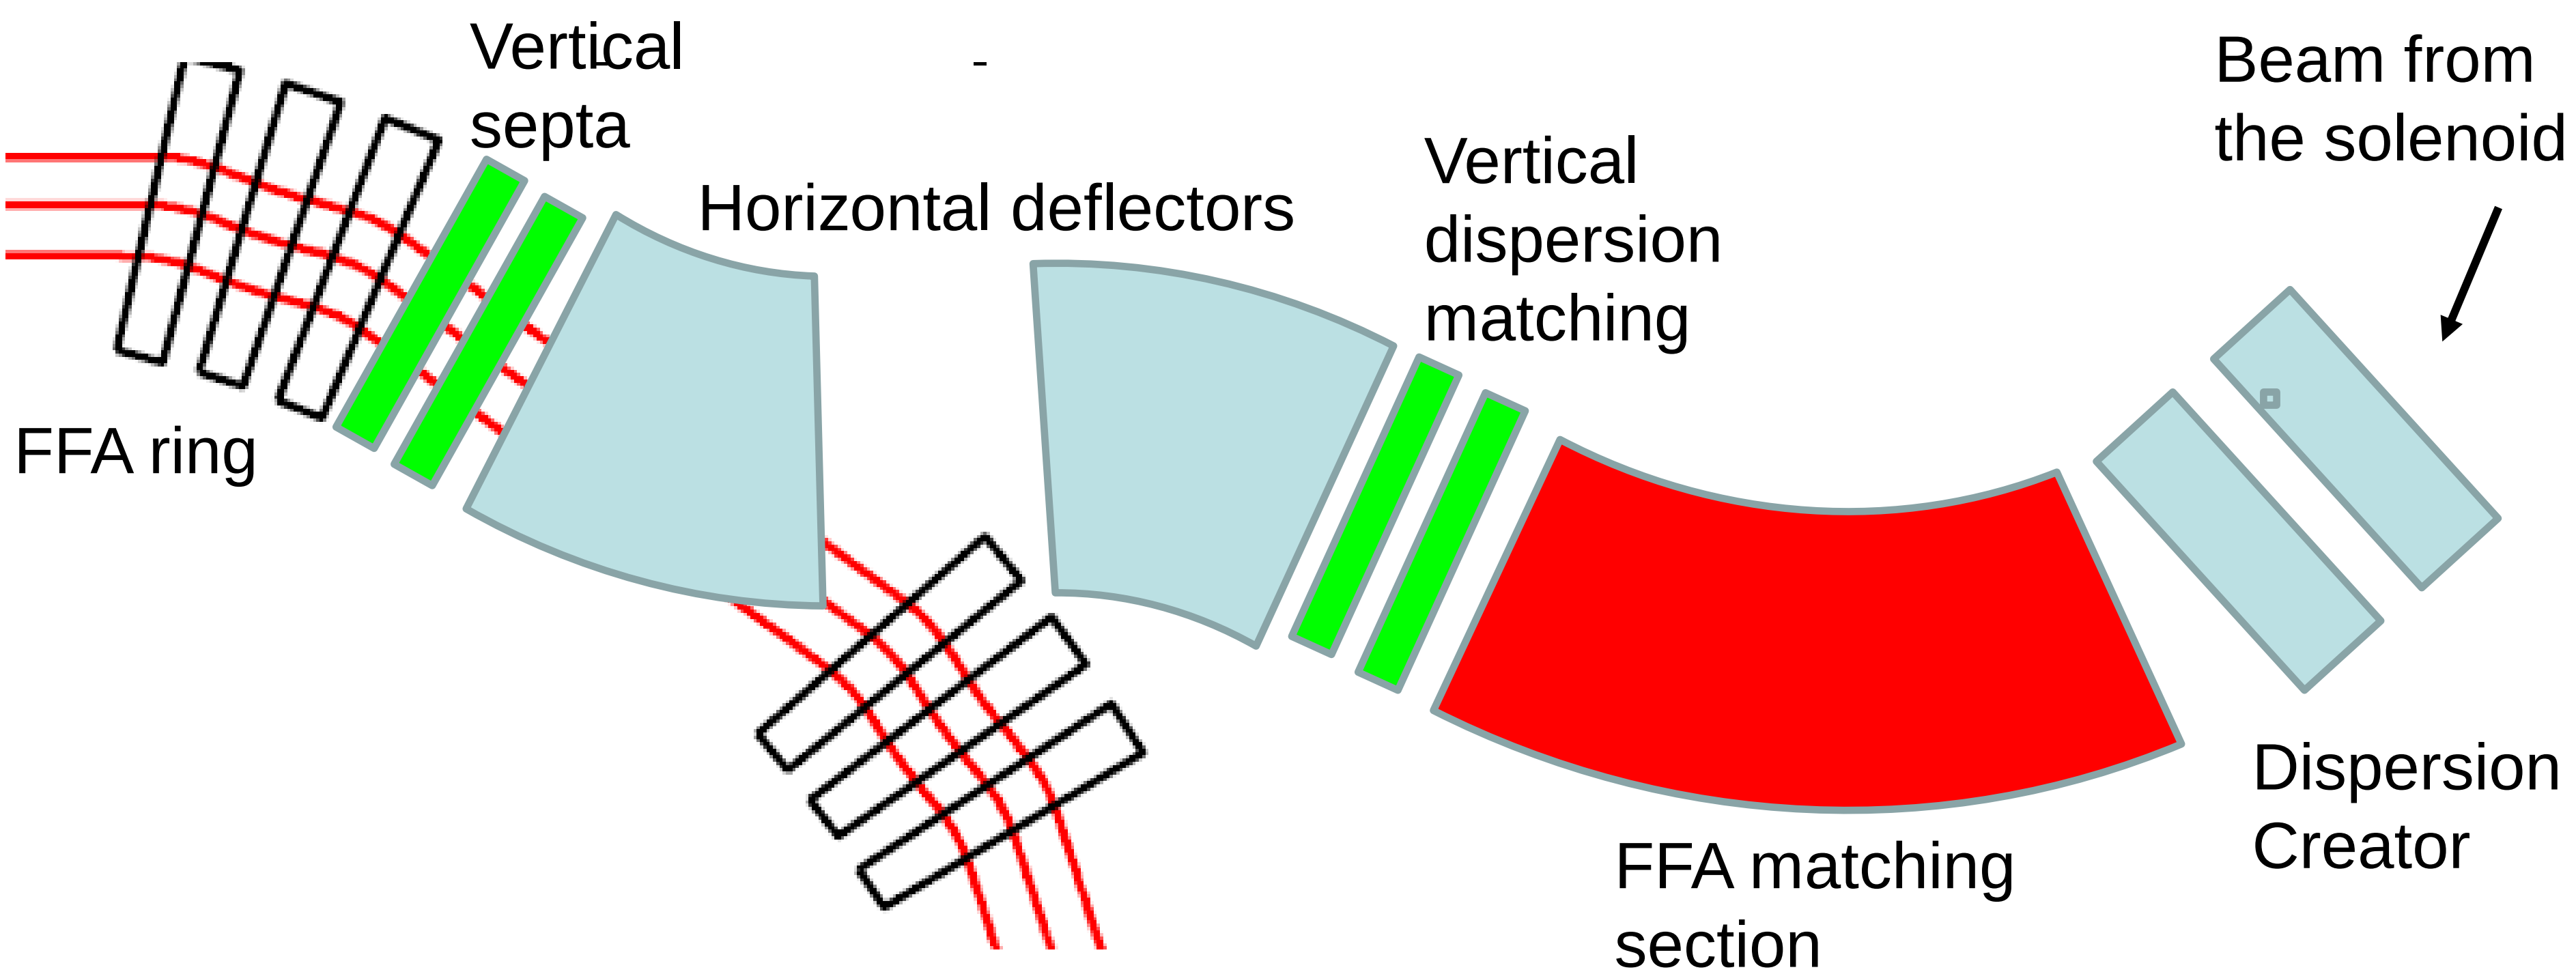

J. Pasternak

New concepts for injection (2)

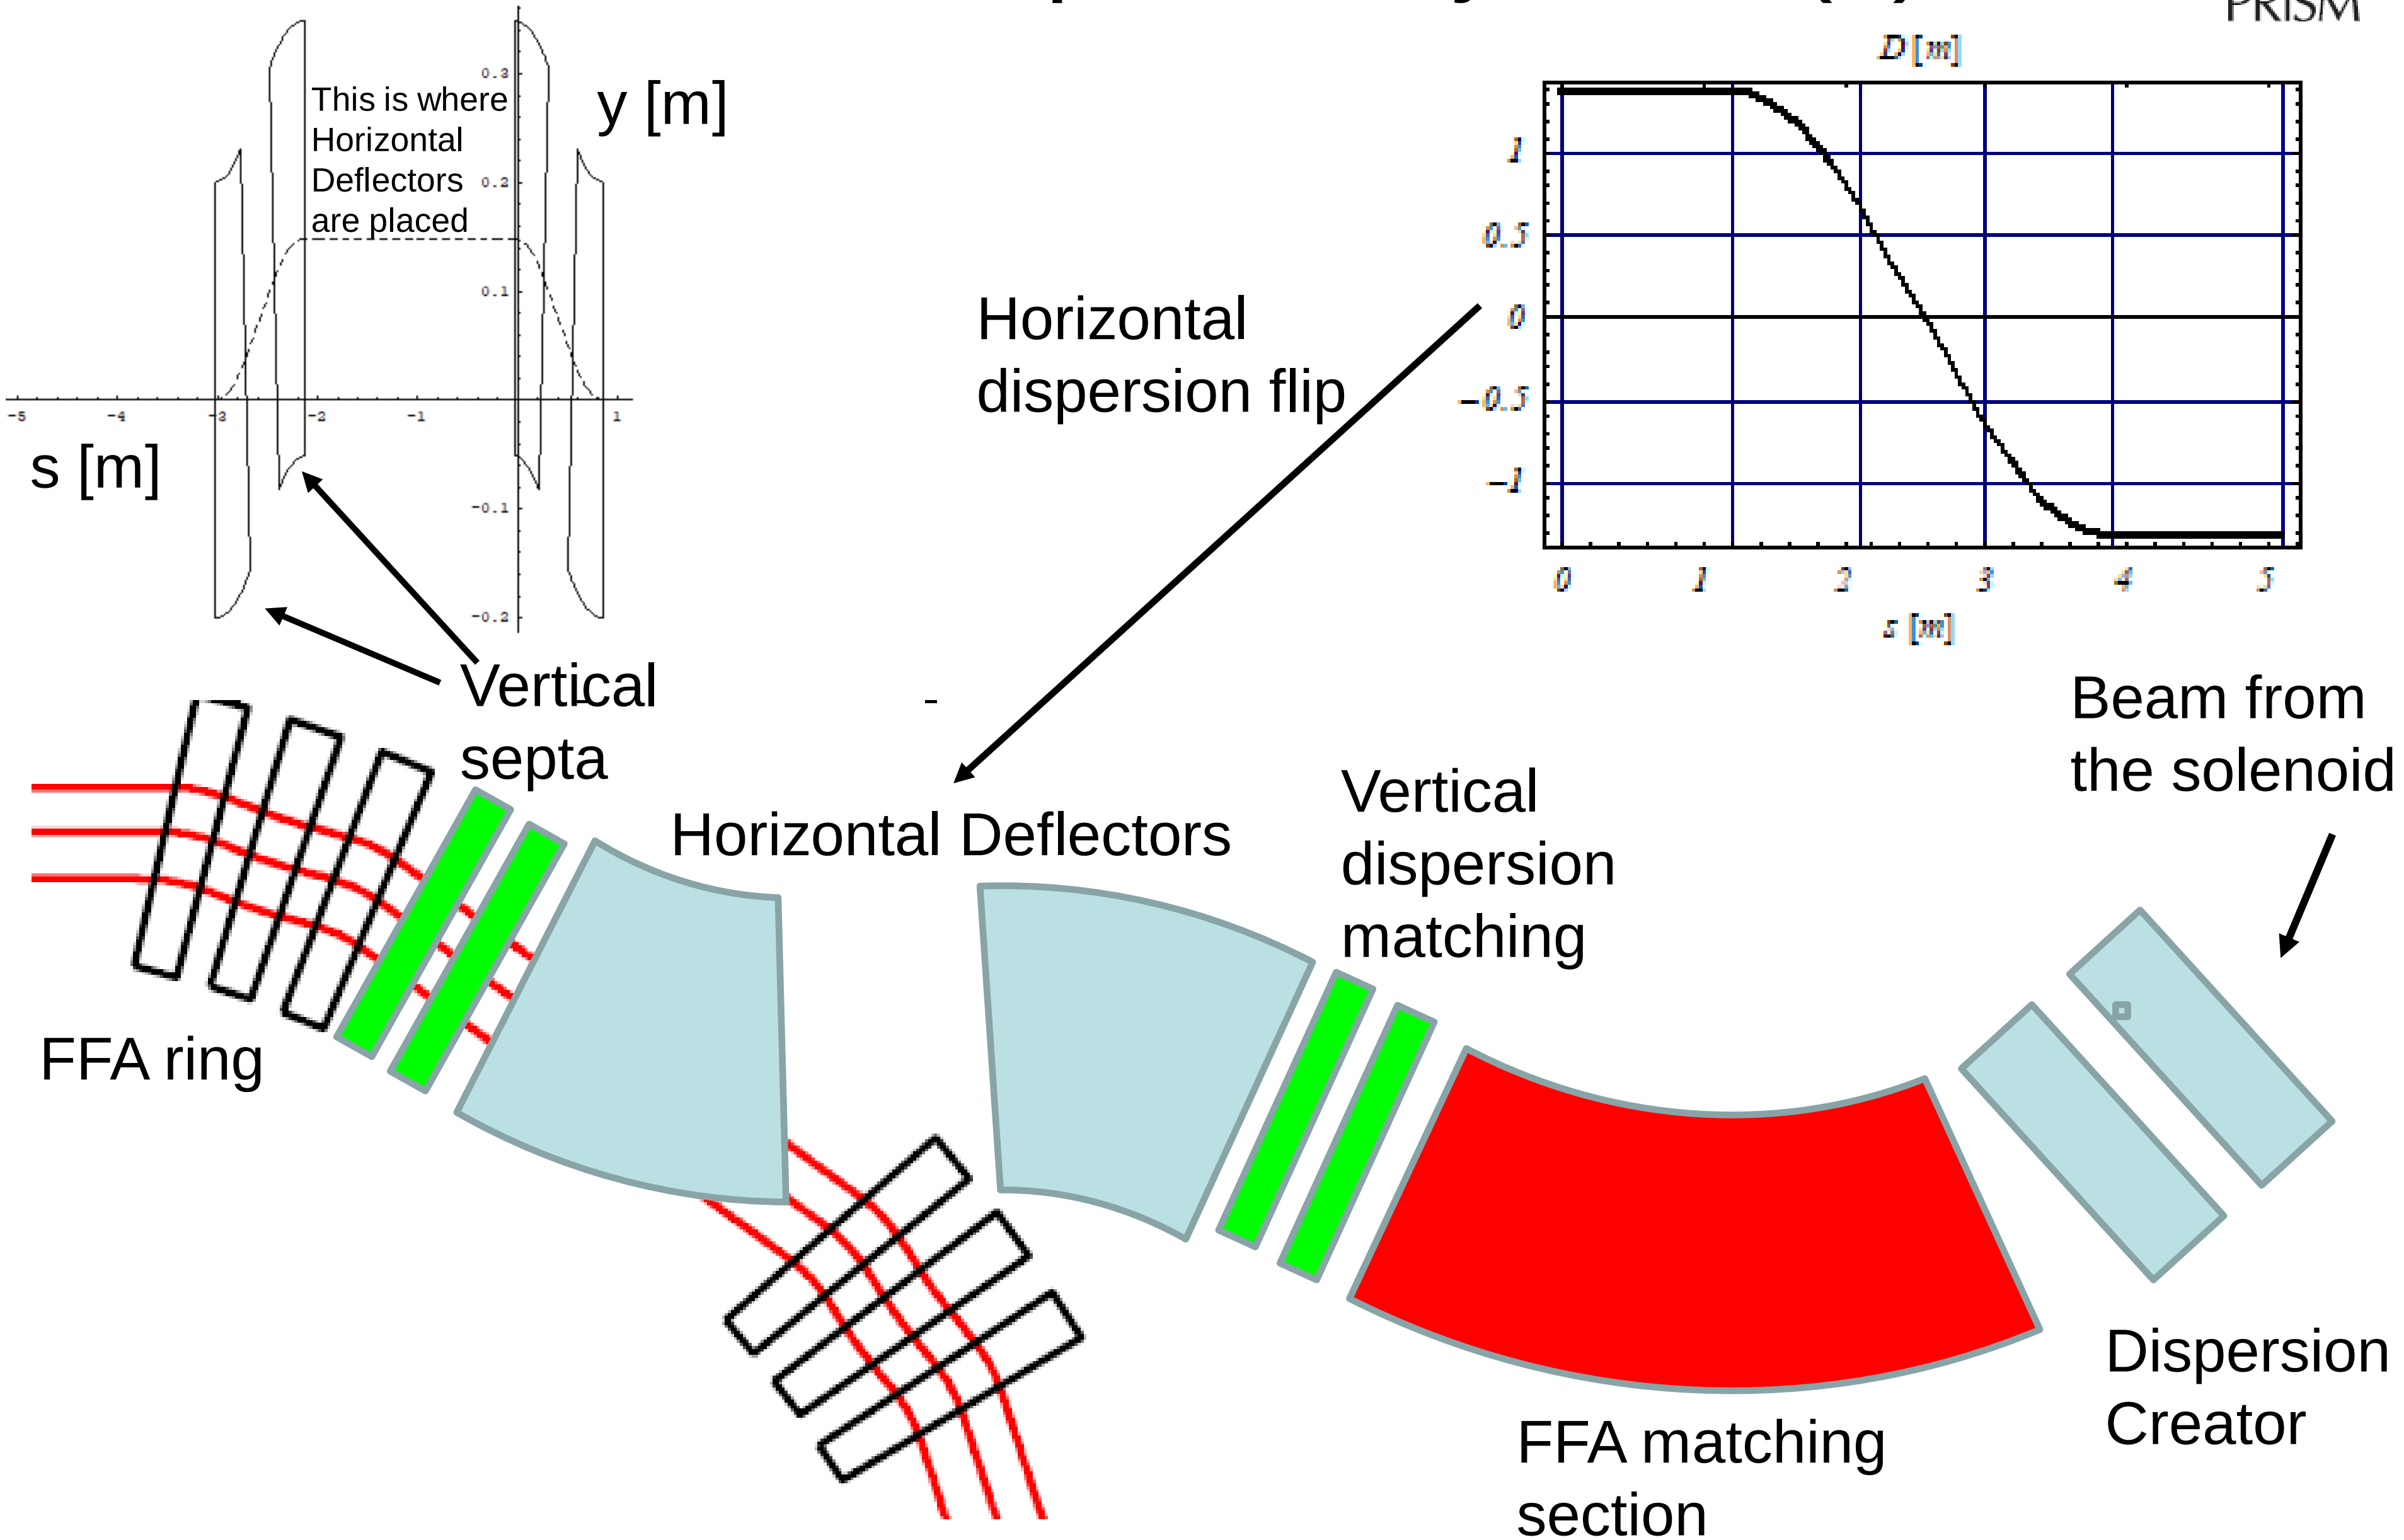

J. Pasternak

Transition from the solenoid to the AG lattice

- Beam from pion capture/muon decay is transported in ~3T solenoid
  - In G4BeamLine simulation beam is launched matched inside 3T solenoid
  - 45 MeV/c reference momentum is assumed
- Field is switched off adiabatically, while beam is matched transversely to the AG lattice

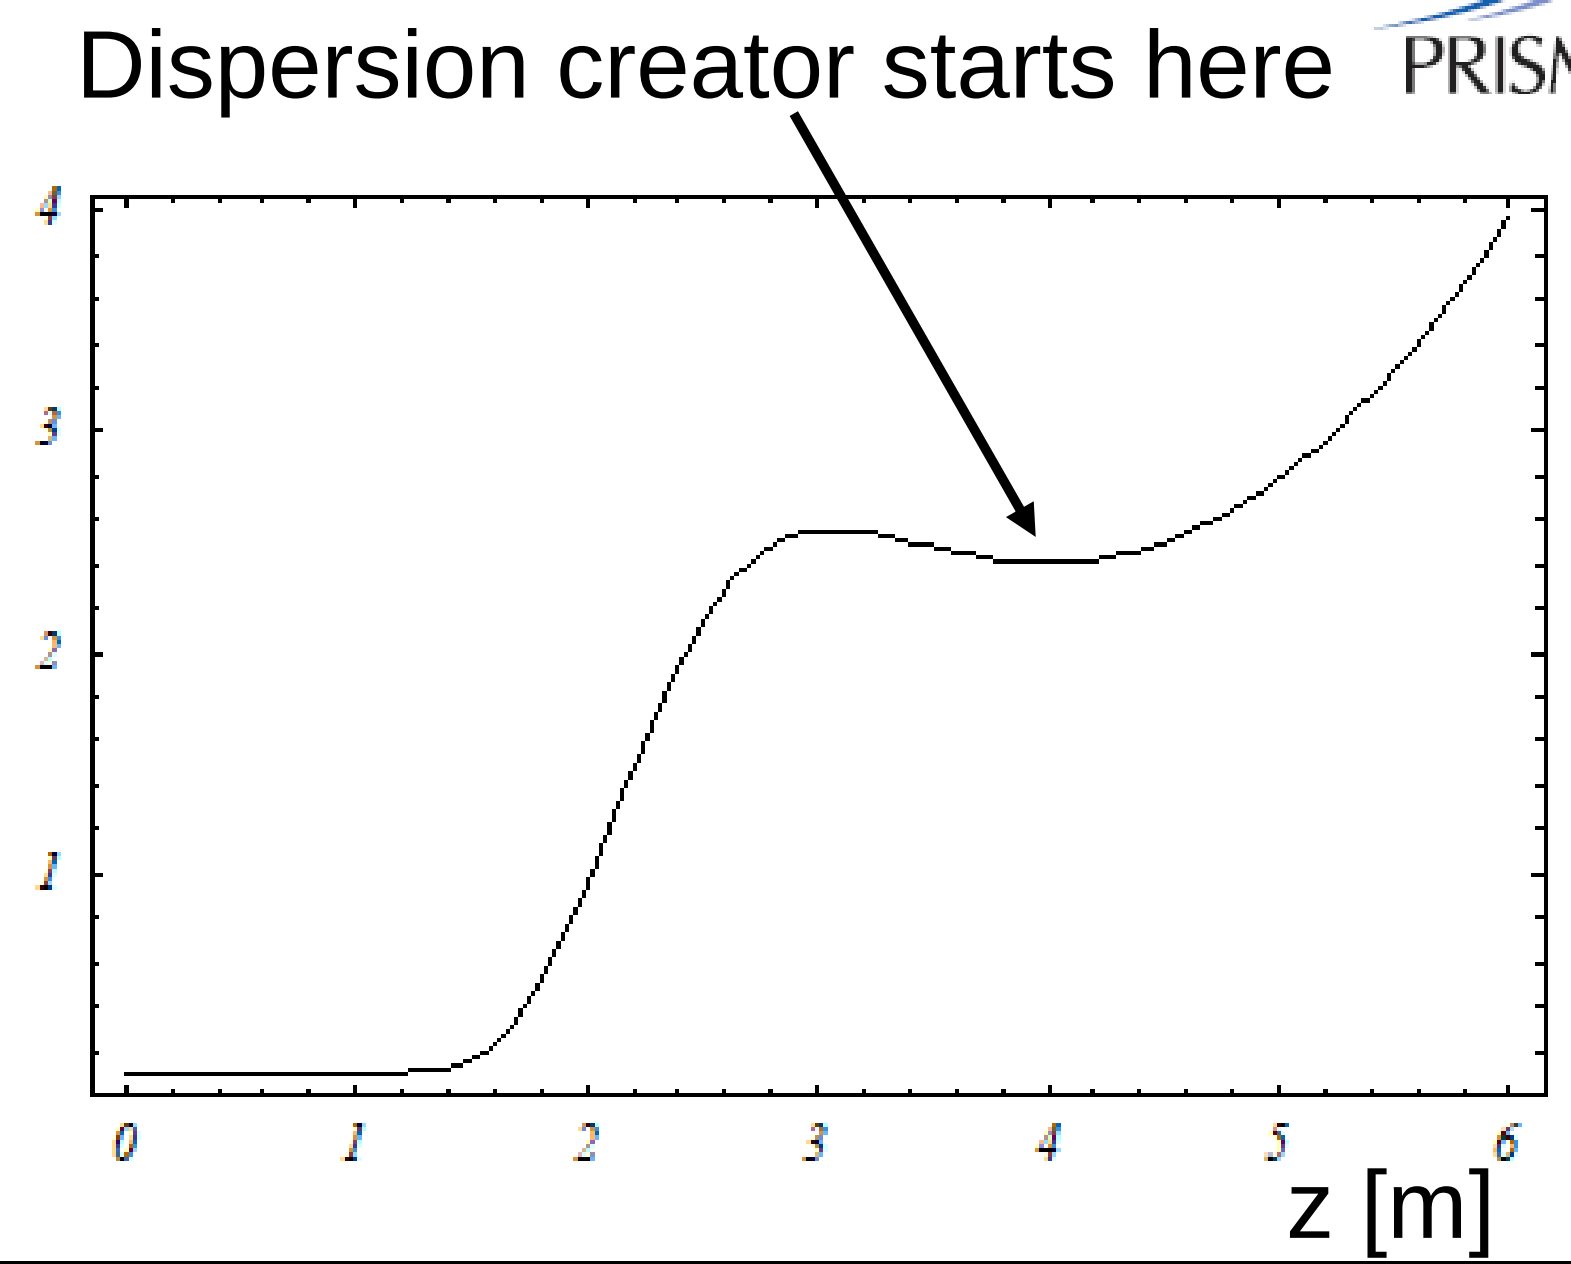

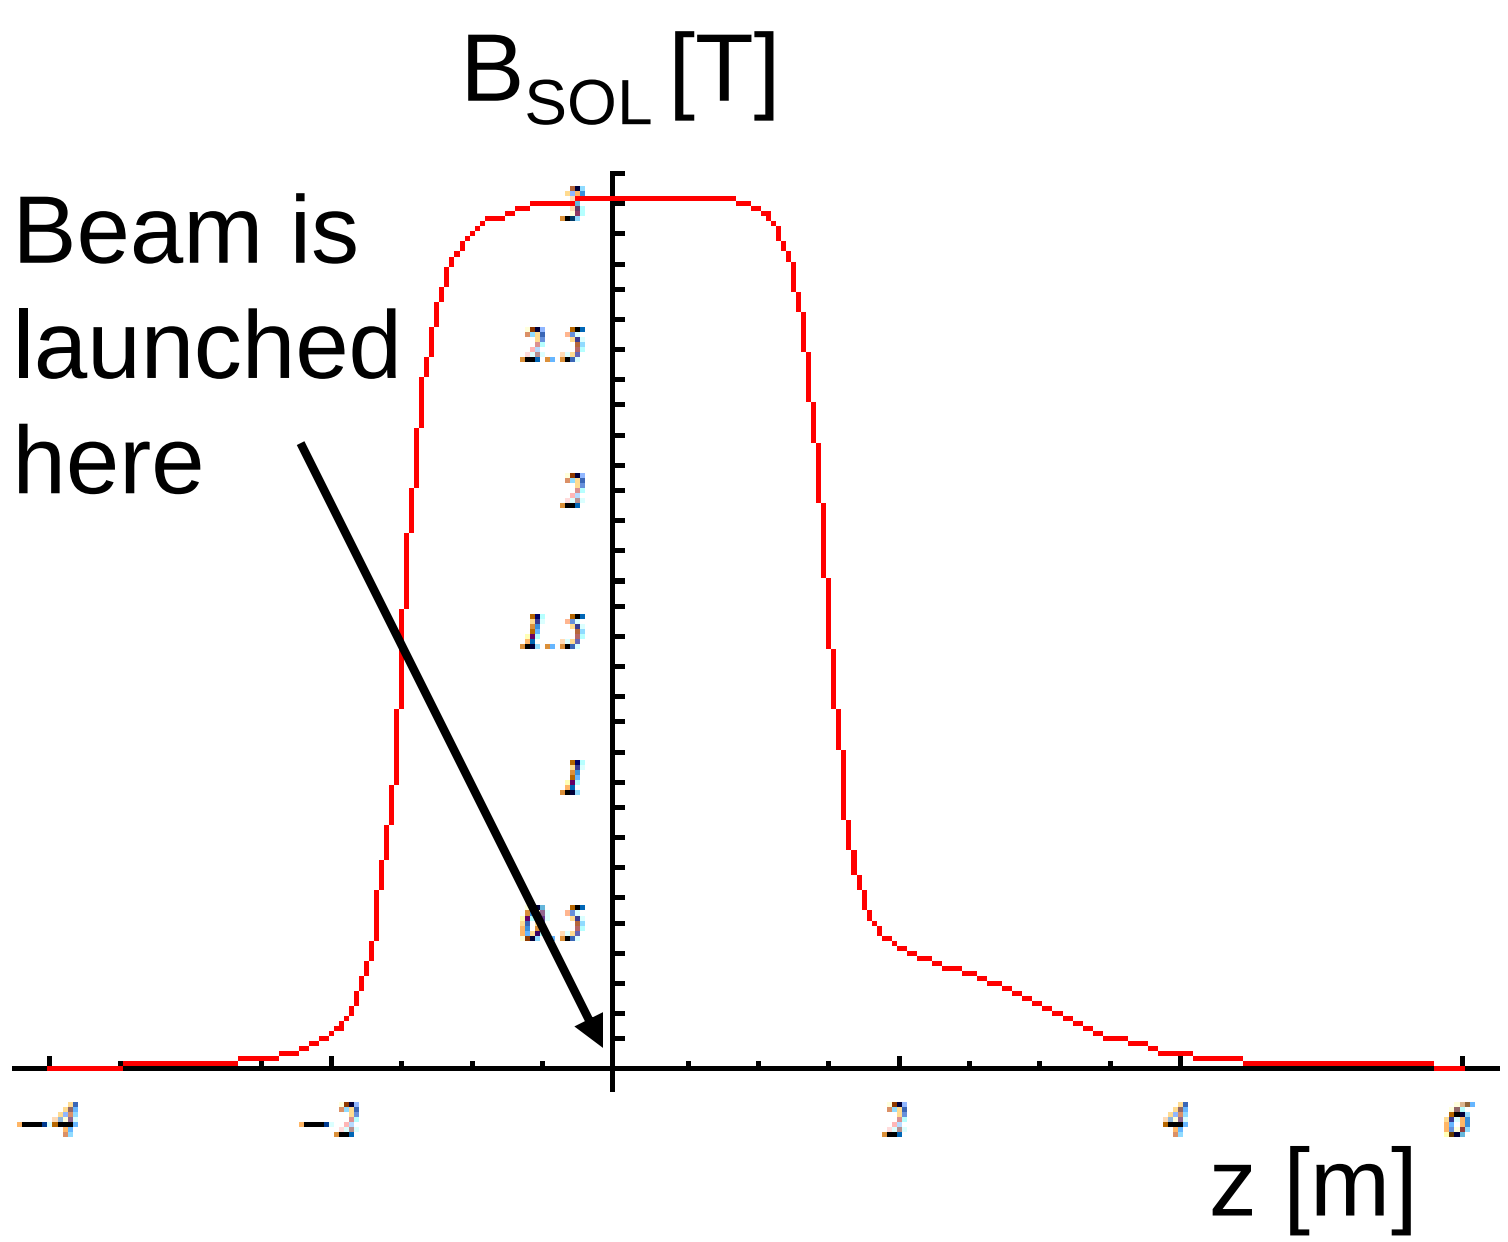

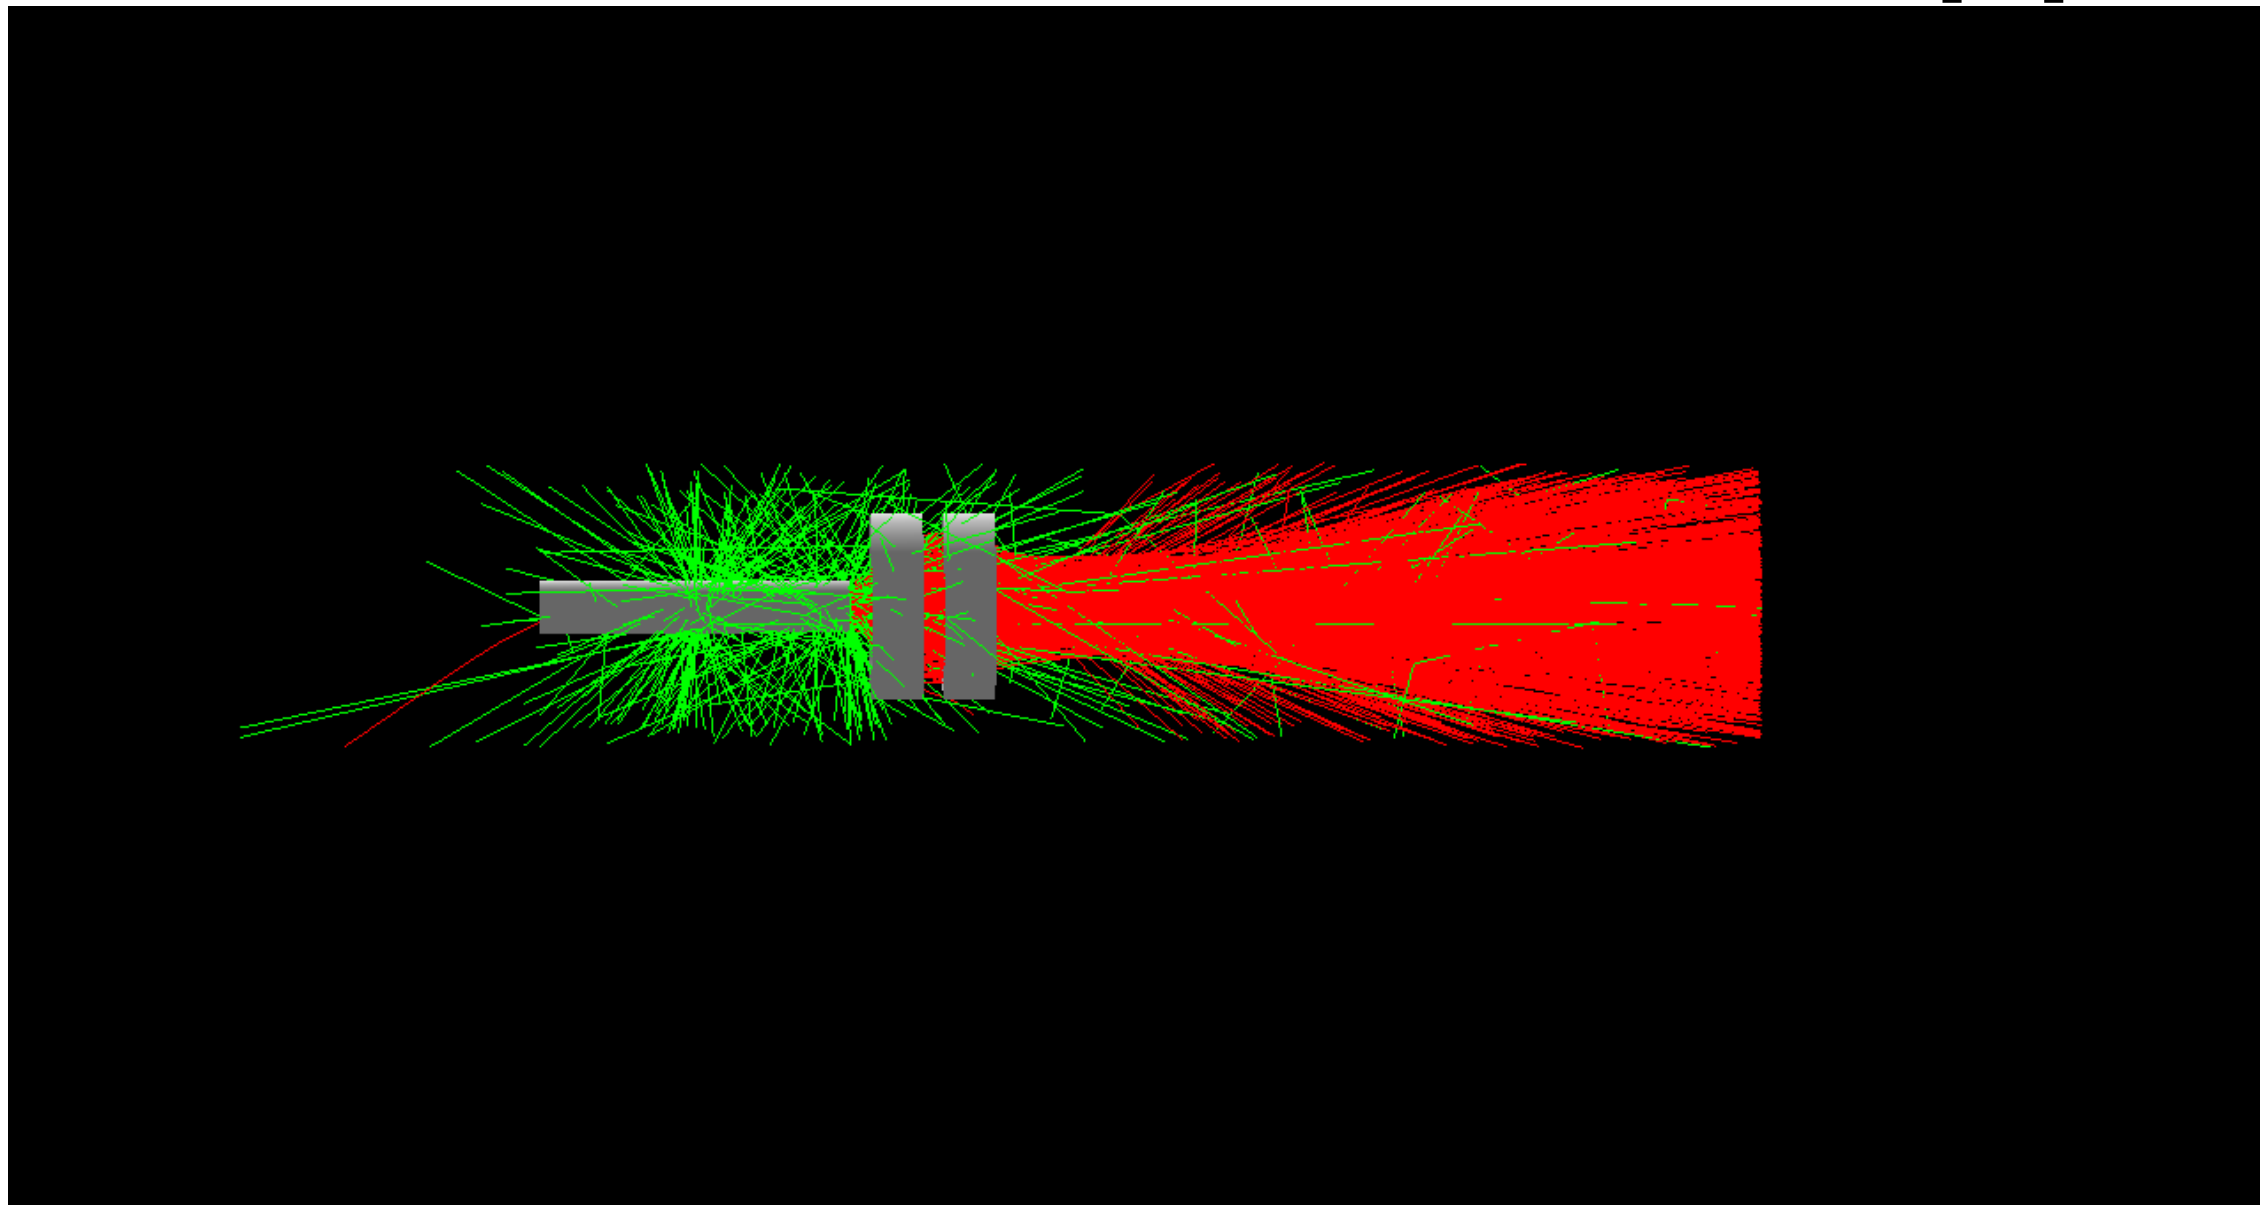

From R. Feng, IC

Preliminary injection line study

Part of the FFA matching section

Dispersion Creator

Solenoidal matching coils

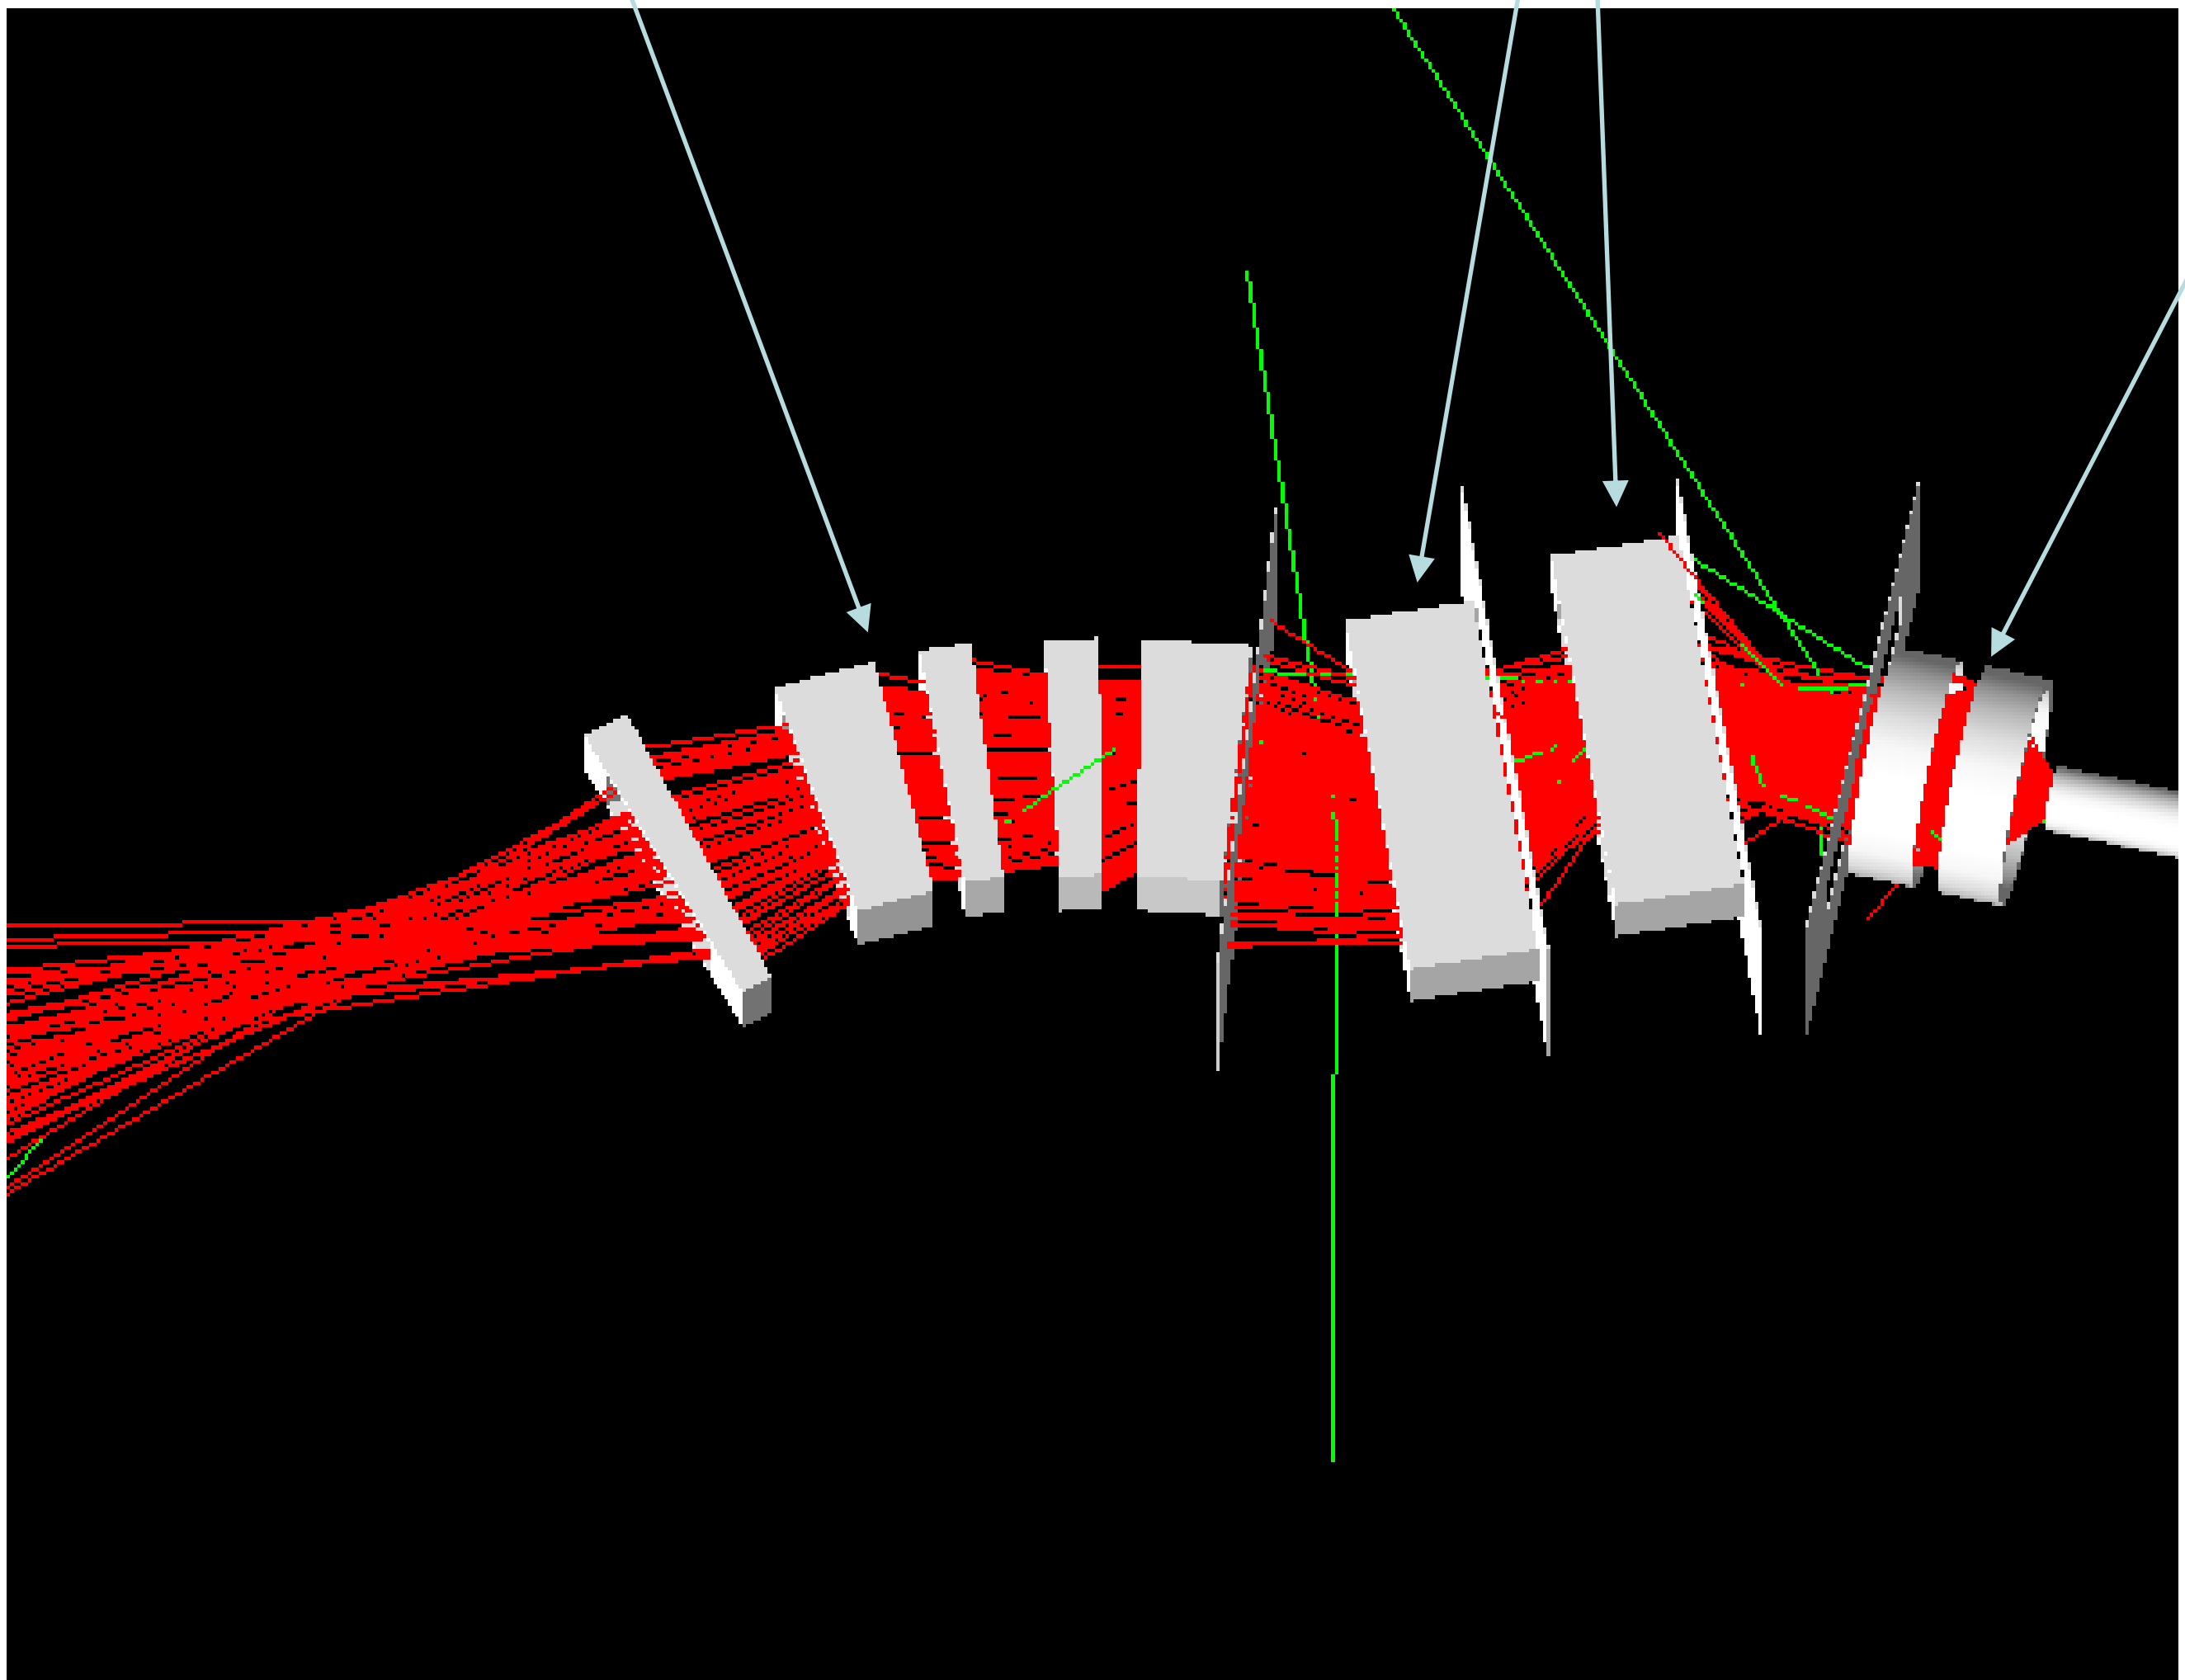

Beam from the solenoid

From R. Feng, IC

Conclusions

- We aim to make further progress on defining the PRISM system for the Snowmass paper (July'21)

- We hope the Snowmass process will lead to P5 endorsing the PRISM system and to prepare the route for its funding

- Compressed bunches needed for PRISM can be generated using PIP-II linac and further upgrades of the FNAL chain or at J-PARC
  - We plan further studies on generating the compressed bunches

- PRISM is a serious choice for the next generation cLFV experiment
- Please join us!

J. Pasternak j.pasternak@imperial.ac.uk